

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission

WELL PLUGGING RECORD

P. O. Box 17027
Wichita, Kansas 67217
NORTH

Graham County, Sec. 30 Twp. 9 Rge. 24 (E) W (W)
Location as "NE/CNW/SW" or footage from lines SE SW SE
Lease Owner Dreiling Oil, Inc.
Lease Name Bieker Well No. 1
Office Address Rt. #2, Victoria, KS 67671
Character of Well (completed as Oil, Gas or Dry Hole) Oil Well
Date well completed 5-22 1971
Application for plugging filed 8-23 1974
Application for plugging approved 8-26 1974
Plugging commenced 11-16 1974
Plugging completed 11-16 1974
Reason for abandonment of well or producing formation Depleted

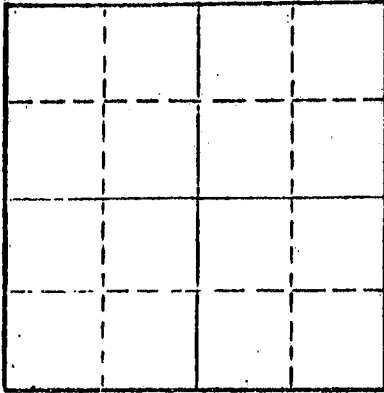

If a producing well is abandoned, date of last production August 1974
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Dale Balthazor, 189 First St. Phillipsburg, KS 67661

Name of Conservation Agent who supervised plugging of this well _____
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4,135 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface Pipe				8 5/8"	220'	0
Casing				4 1/2"	4,114'	1,100'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.
Plugged with 5 sacks Hulls, 30 Gel, 100 sacks cement.
Pumping pressure 250#, shut in pressure 75#.

RECEIVED
STATE CORPORATION COMMISSION
NOV 19 1974
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor Dreiling Oil, Inc.
Address Rt. #2, Victoria, KS 67671

STATE OF KANSAS COUNTY OF ELLIS, ss.
I, Joseph A. Hess, Sec.-Treas. of Drlg. Contrs. (owner, lessee, or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Joseph A. Hess
JOSEPH A. HESS, HAYS, KS 67601
(Address)

Subscribed AND SWORN to before me this 18th day of November, 19 74

My commission expires September 13, 1976
Cecilia Basgall Notary Public.



15-065-20447-0000

DREILING OIL, INC.

Victoria, Kansas 67671

Dreiling Oil, Inc.
Route # 2

WELL LOG

Company	Victoria, Kansas 67671	Sec. 30	Twp. 9	Rng. 24
Farm	Bieker No. 1	Location SE-SW-SE		
Total Depth	4135	County Graham		
Comm.	5-15-71	Comp. 5-22-71	Elevation: 2557'	K. B.
Contractor	Dreiling Oil, Inc. Victoria, Kansas 67671		2554'	D. F.
			2552'	G. R.

Casing Record

220' - 8 5/8"
4114' - 4 1/2"

Cement Record

200 sacks cement
175 sacks salt saturated cement

Production:

Figures Indicate Bottom of Formations

0'	130'	Top Soil, Sand & Gravel
130'	185'	Sand & Clay
185'	220'	Blue Shale
220'	365'	Shale
365'	1500'	Shale & Sand Streaks
1500'	1780'	Shale
1780'	1985'	Sand
1985'	2222'	Shale & Red Bed
2222'	2256'	Anhydrite
2256'	2300'	Shale
2300'	2685'	Shale
2685'	3000'	Shale & Lime
3000'	3229'	Shale & Lime
3229'	3385'	Lime & Shale
3385'	3550'	Shale & Lime
3550'	3571'	Shale & Lime
3571'	3780'	Lime & Shale
3780'	3902'	Lime & Shale
3902'	3932'	Lime
3932'	3990'	Lime
3990'	4053'	Lime
4053'	4080'	Lime
4080'	4094'	Lime
4094'	4125'	Lime
4125'	4135'	Lime
4135'	T. D.	

RECEIVED
STATE CORPORATION COMMISSION


AUG 26 1974

CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS)
)ss
COUNTY OF ELLIS)

I, Leo F. Dreiling, of Dreiling Oil, Inc., upon oath states that the above and foregoing is a true and correct copy from the Daily Dreiling Report from the Bieker #1.

Leo F. Dreiling
Leo F. Dreiling



Subscribed and sworn to before me this 26th day of May, 1971.

Patty Dreiling
Patty Dreiling NOTARY PUBLIC

Commission expires: January 13, 1975