



15-051-22725-00-00

JOHN CARLIN  
R. C. LOUX  
JANE T. ROY  
PHILLIP R. DICK  
CAROL J. LARSON

Governor  
Chairman  
Commissioner  
Commissioner  
Executive Secretary

State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)

200 Colorado Derby Building  
WICHITA, KANSAS 67202

VERBAL PERMIT FORM  
(To be filed by Plugging Agent)

Dear Sir:

Mr. Tom Aom of Pioneer Drilling Co., Inc. has this date requested permission to plug the following described well:

Operator's Full Name: Liberty Enterprises, Inc.

Complete Address: 308 W. Mill St., Plainville, Ks. 67663

Lease Name: Arrowhead Well No. #1

Location: NW NW NW Sec. 31 Twp. 11 Rge. 16 (E) (W)

County: Ellis Total Depth: 3535'

Abandoned Oil Well  Gas Well  Input Well  SWD Well  D&A

Other well as hereafter indicated: \_\_\_\_\_

Mr. Aom was instructed to plug the well as follows:

8 5/8"-313' s.p. cuc. w/170 sacks common-2% Gel.-3% Cal. Cl.

Ordered 130 sacks 50/50 posmix-4% Gel.-3% Cal. Cl. and 8 5/8" plug.

Spotted with drill stem with heavy mud between all plugs.

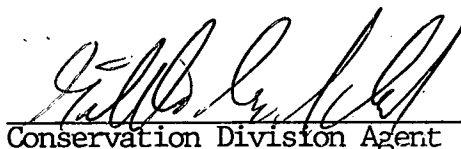
1st plug @ 750' w/70 sacks of cement

2nd plug @ 310' w/40 sacks of cement

3rd plug-solid bridge of hulls and plug @ 40' w/10 sacks of cement

Circulate 10 sacks of cement in rat hole.

Very truly yours,

  
Conservation Division Agent

RECEIVED  
STATE CORPORATION COMMISSION  
4-12-1982  
APR 12 1982  
CONSERVATION DIVISION  
Wichita, Kansas