


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Graham County, Sec. 33 Twp. 9 Rge. 23 (E) W (W)
Location as "NE/CNW/SW" or footage from lines W/2 SW SW
Lease Owner Shields Oil Producers, Inc.
Lease Name Rice Estate Well No. 1
Office Address Shields Building, Russell, Kansas 67665
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 7-22 1971
Application for plugging filed 7-22 1971
Application for plugging approved 7-22 1971
Plugging commenced 7-22 1971
Plugging completed 7-22 1971
Reason for abandonment of well or producing formation Dry Hole

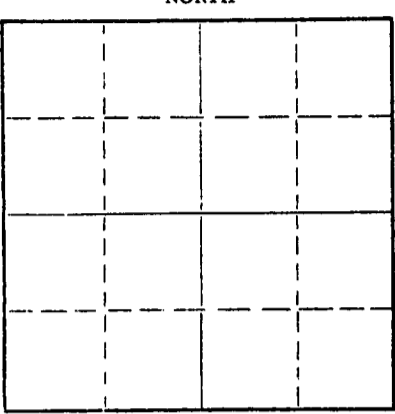

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Bill Nichols
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4,036 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	252'	Cmtd w/175 sax

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Fill hole w/heavy mud
Push bridge plug to 1,150'
Spotted 100 sax cement on plug thru 4 1/2" drill pipe
Fill hole w/heavy mud
Push bridge plug to 275'
Spotted 25 sax cement on plug thru 4 1/2" drill pipe
Fill hole w/heavy mud
Push bridge plug to 40' w/ 1/2 sax hulls on plug
Dump 10 sax cement on plug to cellar

RECEIVED
STATE CORPORATION COMMISSION
JUL 29 1971 7-29-71
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Shields Drilling Co., Inc.
Address Shields Building, Russell, Kansas 67665

STATE OF Kansas, COUNTY OF Russell, ss. R. J. Shields contractor
(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. J. Shields Pres.
Shields Building, Russell, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 27th day of July, 19 71

My commission expires May 26, 1975
Lush Phillips
Notary Public.



Shields


15-065-20466-0000

Russell, Kansas

WELL LOG

Operator: Shields Oil Producers, Inc.
 Well: Rice Estate #1
 Commenced: July 14, 1971
 Completed: July 22, 1971
 Contractor: Shields Drilling Co., Inc.

Well Description: W/2 SW SW
 Sec. 33-9s-23w
 Graham Co., Kansas



CASING RECORD

Size	Run	Pulled
8 5/8"	252'	Cmtd w/175 sax

Elevation: 2,478' RB

Treatment:

Production: D & A

Tops: Heebner 3,767'
 Toronto 3,791'
 Lansing - KC 3,805'

..... Figures Indicate Bottom of Formations

Top soil & clay	81'
Clay, sand & shale	260'
Shale	670'
Shale & sand	2,073'
Anhydrite	2,111'
Shale & shells	2,500'
Shale & lime	3,804'
Lime	4,036' RTD

RECEIVED
 STATE CORPORATION COMMISSION
 JUL 29 1971
 CONSERVATION DIVISION
 Wichita, Kansas

NOTES

DST #1 3,916' - 3,952'

Tool open 15 min. with weak blow
 dying in 6 min. Recovered 10' mud.
 IFP - 38#, FBHP-249#, only pressures recorded

DST #2 3,948' - 3,970'

Tool open 15 min. with weak blow
 dying in 1 min. Recovered 10' mud.
 IFP - 29#, FBHP-45#, only pressure recorded