


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

NORTH

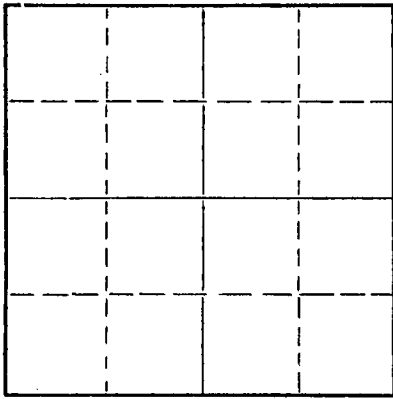

Locate well correctly on above
Section Plat

Graham County. Sec. 14 Twp. 9 Rge. 24 (E) W (W)
Location as "NE/CNW/SW" or footage from lines S^W SW S^W
Lease Owner Honaker-Davis Drlg. Co.
Lease Name Nickelson Well No. 1
Office Address 2008 Lakin, Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 6-11 19 56
Application for plugging filed 6-10 19 56
Application for plugging approved 6-10 19 56
Plugging commenced 6-11 7:30 A.M. 19 56
Plugging completed 6-11 9:30 A.M. 19 56
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19 _____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4030 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	223	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy rotary mud to 210'. Dumped in 1/2 sack hulls. Plug. Dumped in 15 sacks cement. Filled hole with heavy rotary mud to 40'. Dumped in 1/2 sack hulls. Plug. Dumped in 10 sacks cement to bottom of cellar.

6-16-56

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor _____
Address _____

STATE OF KANSAS, COUNTY OF BARTON, ss.
S. C. Lingreen (employee of owner) or (~~owner or operator~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Stanley C. Lingreen
Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 14th day of June, 19 56

My commission expires 6-25-59
Kenneth G. Fischer, Notary Public.

PLUGGING
FILE SEC. 14 T. 9 R. 24W
BOOK PAGE 71 LINE 11

DRILLERS LOG

Nickelson No. 1
Loc: SW SW SW
Sec: 14-9S-24W
Graham County, Kansas
Company: Honaker-Davis Drlg. Co., et al
Contractor: Honaker-Davis Drlg. Co.

Comm: 6- 2-56
Comp: 6-11-56
Rotary Total Depth: 4030'
Casing: 8-5/8" at 223'
D & A


0	60	Top soil & post rock	
60	139	Sand & Gravel	8-5/8" casing cemented at
139	750	Blue Shale	223' with 175 sacks cement
750	1125	Red Bed & Shale	
1125	2096	Shale	
2096	2136	Anhydrite	
2136	2475	Shale & Shells	
2475	4030	Lime & Shale	
4030		Rotary Total Depth	D & A

I certify that this is the true and correct copy
of the above log to the best of my knowledge.



W. S. Forbes

Subscribed and sworn to before me this 13th day
of June, 1956.



Kenneth G. Fischer, Notary Public

My commission expires: 6-25-59

PLUGGING
FILE SEG 14 T 9 R 24W
BOOK PAGE 71 VOL 11