


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

NORTH

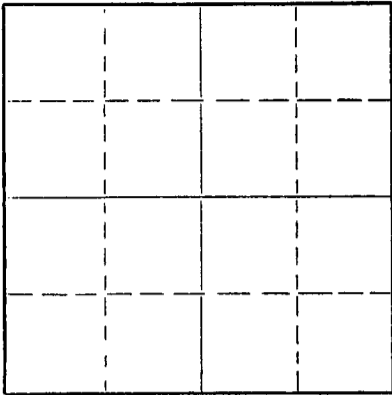

Locate well correctly on above
Section Plat

Ellis County, Sec. 32 Twp. 11 S Rge. 20 ~~xxx~~ (W)

Location as "NE/CNW/SW" or footage from lines. NW NW NW
Lease Owner D. R. Lauck Oil Company, Inc.
Lease Name Keagy Well No. 1
Office Address 301 South Broadway Wichita 2 Kans
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date well completed September 2nd 19 54
Application for plugging filed September 2nd 19 54
Application for plugging approved September 2nd 19 54
Plugging commenced September 2nd 19 54
Plugging completed September 2nd 19 54
Reason for abandonment of well or producing formation dry hole

If a producing well is abandoned, date of last production -- 19 --
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well _____
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3994 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Surface water	0	148'	8 5/8"	148'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

mud 3994' to 145'
plug 145' to 141'
cement 141' to 111'
mud 111' to 40'
plug 40' to 36'
cement 36' to 6' bottom of cellar

9-9-1954

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor D. R. Lauck Oil Company, Inc.
Address Wichita Kansas


STATE OF Kansas, COUNTY OF Sedgwick, ss.
John H. Knightley (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) John H. Knightley
Wichita Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 8th day of September, 19 54

My commission expires Sept. 14, 1955

Elizabeth Jay
Notary Public.



15-051-03556-00-00

D. R. Lauck Oil Company, Inc.

Keagy #1

NW NW NW Sec. 32-118-20W
Ellis County Kansas

Commenced: August 22, 1954
Completed: September 2, 1954

TD 3994 Casing: 148' 8 5/8" cemented with 125 sax
Elevation: GR 2262, DF 2265, KB 2267

Sand & shale	148
shale	535
shale & sand	740
sand	965
sand & shale	1165
sand	1410
shale & red bed	1675
Anhydrite	1725
shale-shells & red bed	1900
shale & shells	2505
lime & shale	2610
Brown lime & shale	2720
lime & shale	2800
sand	2815
lime & shale	2820
lime	2902
lime & shale	3480
lime	3883
conglomerate	3985
Arbuckle	3994

Tops	
Anhydrite	1675 pl 592
Topeka	3308 - 1041
Heebner	3530 - 1263
Toronto	3554 - 1287
Lansing	3572 - 1305
Base Kansas City	3805 - 1538
Marmaton Chert	3858 - 1591
Cherty Conglom.	3878 - 1611
Arbuckle	3985 - 1718
RTD	3994 - 1727

DST #1 3620-3632 weak blow
for 2 min. open 30 min.
recov. 5' mud
BHP 1180#

D & A.

RTD 3994

9-9-1954

INDEXING
 32-118-20W
 35