


15-167-20926-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

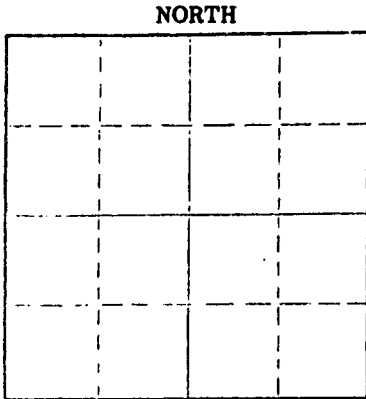

Locate well correctly on above Section Plat

Russell County. Sec. 27 Twp. 11 Rge. 15 (E)W (W)
Location as "NE/CNW/SE" or footage from lines. N/2 NE/4 SE/4
Lease Owner Shields Oil Producers, Inc.
Lease Name Eulert "C" Well No. 3
Office Address Shields Bldg., Russell, Kansas 67665
Character of Well (Completed as Oil, Gas or Dry Hole) Dry hole
Date well completed 7-20 19 76
Application for plugging filed 7-20 19 76
Application for plugging approved 7-20 19 76
Plugging commenced 7-20 19 76
Plugging completed 7-20 19 76
Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production _____ 19 ____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Duane Rankin
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3,322 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	270'	Cmtd. w/165 sax

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Fill hole w/heavy mud
Push plug to 550'
Spotted 50 sax cement on plug thru 4 1/2" drill pipe
Fill hole w/heavy mud
Push plug to 270'
Spotted 25 sax cement on plug thru 4 1/2" drill pipe
Push plug to 40' w/1/2 sax hulls on plug
Dump 10 sax cement on plug to cellar
Dump 2 sax cement in rat hole and mouse hole

Name of Plugging Contractor Shields Drilling Co., Inc. (If additional description is necessary, use BACK of this sheet)
Address Shields Bldg., Russell, Kansas 67665 8-2-1976

STATE OF KANSAS COUNTY OF RUSSELL
R.L. Shields (Employer of well) or (Operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R.L. Shields
Shields Bldg., Russell, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 28th day of July 19 76

My commission expires May 26, 1979 Notary Public.



Shields


15-167-20926-00-00

Russell, Kansas

WELL LOG

Operator: Shields Oil Producers, Inc.
 Well: Eulert "C" #3
 Commenced: July 13, 1976
 Completed: July 20, 1976
 Contractor: Shields Drilling Co., Inc.

Well Description: N/2 NE/4 SE/4
 Sec. 27-11S-15W
 Russell Co., Kansas



CASING RECORD

Size	Run	Pulled
8 5/8"	270'	Cmtd. w/165 sax

Elevation: 1,827' KB

Treatment:

Production: D & A

Tops:

..... Figures Indicate Bottom of Formations

Surface clay, sand & shale	276'	
Shale	450'	
Sand	560'	
Redbed	650'	
Shale	909'	
Anhydrite	943'	
Shale & shells	1,278'	
Shale	1,530'	
Shale & lime	2,772'	
Lime	3,322'	RTD

RECEIVED
 STATE COMMISSION
 8-2-1976
 193 02 1976
 CONSERVATION DIVISION
 Wichita, Kansas

Notes