


15-167-20314-00-00

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

Russell County, Sec. 36 Twp. 11 Rge. 15 (E) W (W)

Location as "NE/CNW/SE/SW" or footage from lines SE SE NW  
Lease Owner Shields Oil Producers, Inc. & Prospect Oil, Inc.  
Lease Name Hartman Well No. 1  
Office Address Shields Building, Russell, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole  
Date well completed April 24, 19 69  
Application for plugging filed April 24, 19 69  
Application for plugging approved April 24, 19 69  
Plugging commenced April 24, 19 69  
Plugging completed April 24, 19 69  
Reason for abandonment of well or producing formation Dry hole

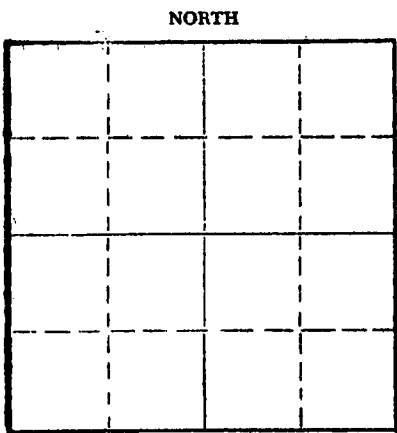

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Don Truan  
Producing formation Depth to top Bottom Total Depth of Well 2, 935 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	250'	Cmtd. w/175 sax

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Fill hole w/ heavy mud  
Set bridge plug @ 480'  
Dump 40 sax cement on plug thru 4 1/2" drill pipe  
Fill hole w/ heavy mud  
Set bridge plug @ 240'  
Dump 25 sax cement on plug thru 4 1/2" drill pipe  
Fill hole w/ heavy mud  
Set bridge plug @ 40' w/ 1/2 sax hulls on plug  
Dump 10 sax cement on plug to cellar

RECEIVED  
STATE CORPORATION COMMISSION  
MAY 9 1969  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Shields Drilling Co., Inc.  
Address Shields Building, Russell, Kansas

STATE OF Kansas COUNTY OF Russell, ss.  
R. J. Shields (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. J. Shields  
Shields Building, Russell, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 8th day of May, 1969

My commission expires May 26, 1971  
Notary Public.



# Shields


Russell, Kansas

## WELL LOG

15-167-20314-00-00

Operator: Shields Oil Producers, Inc.  
 & Prospect Oil, Inc.  
 Well: Hartman #1  
 Commenced: April 20, 1969  
 Completed: April 24, 1969  
 Contractor: Shields Drilling Co., Inc.

Well Description: SE SE NW  
 Sec. 36-11S-15W  
 Russell Co., Kansas



Elevation: 1,803' RB

Treatment:

Production: D & A

Tops: Topeka 2,668'  
 Heebner 2,920'

### CASING RECORD

Size	Run	Pulled
8 5/8"	250'	Cmtd. w/ 175 sax

..... Figures Indicate Bottom of Formations .....

Clay	10'
Rock & shale	255'
Shale, sand & redbed	875'
Anhydrite	912'
Shale, shells & salt	1,500'
Lime & shale	1,775'
Lime	1,935'
Lime & shale	2,614'
Lime	2,935' RTD

RECEIVED  
 STATE CORPORATION COMMISSION  
 MAY 9 1969  
 CONSERVATION DIVISION  
 Wichita, Kansas

Notes