

15-051-00354-00-00


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

WELL PLUGGING RECORD

Ellis County. Sec. 14 Twp. 11S Rge. 16W (E) (W)
Location as "NE/CNW%SW%" or footage from lines NW SE SW
Lease Owner Okmar Oil Company
Lease Name Bowlby A Well No. 1
Office Address 820 Union National Bldg., Wichita, Kans.
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 10-9-59 19
Application for plugging filed 10-9-59 19
Application for plugging approved 10-9-59 19
Plugging commenced 10-9-59 19
Plugging completed 10-9-59 19
Reason for abandonment of well or producing formation Dry Hole

NORTH

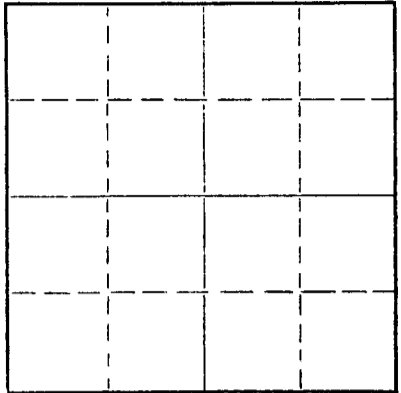

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production _____ 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3430 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	170'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

1st plug set @ 600' with 20 sacks cement.
2nd plug set @ 160' with 20 sacks cement.
Top plug set @ 40' with 10 sacks cement, 1/4 sx. hulls.

RECEIVED
STATE CORPORATION COMMISSION
10-15-1959
OCT 15 1959
CONSERVATION DIVISION
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Leben Drilling, Inc.
Address 905 Central Bldg., Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Frank Hamlin (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Frank Hamlin
905 Central Bldg., Wichita, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 12th day of October, 19 59

My commission expires April 23, 1963
Juanita M. Green Notary Public.



DRILLER'S LOG

COMPANY:
CONTRACTOR:
FARM:

OKMAR OIL COMPANY
LEBEN DRILLING, INC.
BOWLBY A #1 NW SE SW
SECTION 14-11S-16W
ELLIS COUNTY, KANSAS
9-28-59
10-9-59

COMMENCED:
COMPLETED:

0	20	Surface Clay
20	164	Shale
164	500	Shale and Shalls
500	985	Shale and Redbed
985	1015	Anhydrite
1015	1420	Shale and Lime
1420	1865	Shale and Lime
1865	2085	Lime and Shale
2085	2245	Lime and Shale
2245	2400	Shale and Lime
2400	2665	Lime and Shale
2665	2815	Shale and Lime
2815	2880	Shale and Lime
2880	2980	Shale and Lime
2980	3060	Shale and Lime
3060	3090	Lime
3090	3110	Lime
3110	3180	Lime
3180	3320	Lime
3320	3430	Lime
	<u>3430</u>	<u>Rotary Total Depth - D & A</u>

Set 8 5/8" surface casing @ 170' with 110 sacks Sunset cement.

I, Frank Hamlin, do hereby certify that the above and foregoing is a true and correct copy of the log of the Bowlby A #1, located in the NW SE SW of Section 14, Township 11 South, Range 16 West, Ellis County, Kansas, as reflected by the files of Leben Drilling, Inc.

Frank Hamlin

Frank Hamlin

STATE OF KANSAS)
) SS.
COUNTY OF SEDGWICK)

Subscribed and sworn to before me, a Notary Public, in and for Sedgwick County, Kansas, this 12th day of October, 1959.

Juanita M. Green

Juanita M. Green, Notary Public

My Commission Expires:
April 23, 1963