


15-051-01070-00-00

WELL PLUGGING RECORD

Give Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

Ellis County, Sec. 19 Twp. 11 Rge. 19 XXXX (W)
Location as "NE/CNW/SW" or footage from lines SW SW NE
Lease Owner K & E Drilling, Inc. - R. A. Cook
Lease Name Rathbun Well No. #1
Office Address 1006 Central Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date well completed October 23, 1955 19
Application for plugging filed 10-23-55 19
Application for plugging approved 10-23-55 19
Plugging commenced 10-23-55 19
Plugging completed 10-23-55 19
Reason for abandonment of well or producing formation commercial quantities of oil not found
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

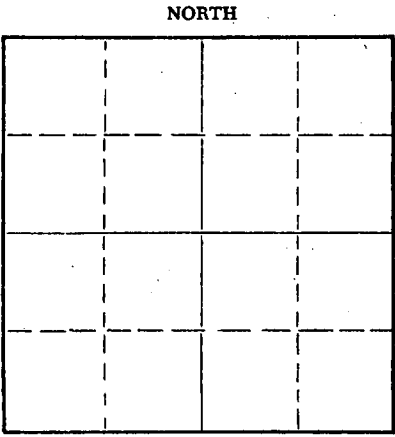

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____ Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	179	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy mud from 3615' to 179'. Set wooden plug with 15 sacks cement. Second plug at 30' and capped with 10 sacks cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor K & E DRILLING, INC.
Address 1006 Central Bldg., Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Dale Silcott (employee of owner) or (operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) Dale Silcott

(Address)

SUBSCRIBED AND SWORN TO before me this 26th day of October, 19 55

My commission expires June 25, 1956

Francis Markley Notary Public.

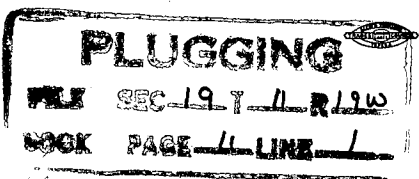

10-28-1955

15-051-01070-00-00

K & E DRILLING, INC. - R. A. COOK
Rathbun #1

SW SW NE 19-11S-19W
Ellis County, Kansas

Comm: October 14, 1955
Comp: October 23, 1955
Total Depth: 3615'

Casing

8 5/8" Set @ 179'

Cement

140 sacks

<u>FORMATION</u>	<u>DEPTH</u>
Clay & sand	0 - 35
Sand	35 - 68
Shale & sand	68 - 90
Shale	90 - 179
Shale	179 - 230
Shale & sand	230 - 845
Sand	845 - 1050
Red Bed and shale	1050 - 1320
Shale shells	1320 - 1364
Anhydrite	1364 - 1397
Shale & shells	1397 - 2000
Shale & lime	2000 - 3190
Lime	3190 - 3519
Lime - shale	3519 - 3555
Shale & lime	3555 - 3615

10-28-1955

STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)

I hereby certify that the above information is true and correct to the best of my knowledge.

Ralph Shultz

Subscribed and sworn to before me this 26th day of October, 1955

My commission expires: June 25, 1956

Frances Mader
Notary Public

PLUGGING
FILE SEC 19-T-11R19W
BOOK PAGE 11 LINE 1