


15-179-20225-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

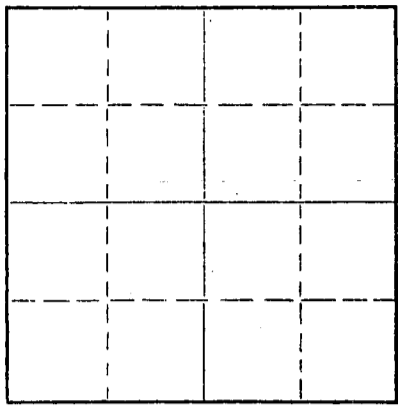

Locate well correctly on above
Section Plat

Sheridan County. Sec. 6 Twp. 9 Rge. 28W (E) (W)
Location as "NE/CNW/SW" or footage from lines. 150' SW of SE SW
Lease Owner Chief Drilling Co., Inc.
Lease Name Mosier Well No. #2
Office Address Suite 905 Century Plaza, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date well completed 8-16-69 19__
Application for plugging filed 8-16-69 19__
Application for plugging approved 8-16-69 19__
Plugging commenced 8-16-69 19__
Plugging completed 8-16-69 19__
Reason for abandonment of well or producing formation dry hole

If a producing well is abandoned, date of last production _____ 19__
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well W.E. Nichols
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4075' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	218'	8 5/8"		

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged through drill pipe @ 1400' w/100 sacks cement
plugged through drill pipe @ 185' w/20 sacks cement
Plugged through drill pipe @ 40' w/10 sacks cement

RECEIVED
STATE CORPORATION COMMISSION
AUG 21 1969
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor W.E. Nichols
Address Morland, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Jim Robinson (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jim Robinson
Suite 905 Century Plaza, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 20th day of August, 19 69

Betty Brandt
Betty Brandt Notary Public.
My commission expires May 9, 1971



WELL LOG

Chief Drilling Co., Inc.
905 Century Plaza
Wichita, Kansas 67202

#2 MOSIER
SE/4 Sec. 6-9-28W
Sheridan County

Contractor: Chief Drilling Co., Inc.

Commenced: 8-9-69
Completed: 8-16-69

Casing Record: Set 209' of 8 5/8" @ 218'
w/200 sacks cement.

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>ELEVATION</u>	<u>FORMATION TOPS</u>
Surface clay & sand	0	45	2705 Gr.	
Shale & sand streaks	45	106	2707 D.F.	
Shale	106	215	2710 K.B.	
Shale & sand	215	1130		
Shale, sand strks, shells	1130	1983		
Sand & shale	1983	2322		Anhydrite 2322 + 388
Anhydrite	2322	2359		Pennsylvanian 3437 - 727
Shale & shells	2359	2830		Elmont 3482 - 772
Shale & lime	2830	4075		Howard 3515 - 805
Total depth	4075			Heebner 3782 - 1072
				Toronto 3801 - 1091
				Lansing 3816 - 1106

RECEIVED
STATE CORPORATION COMMISSION
AUG 21 1969
CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK) ss:

I hereby certify that the above is a true and correct copy of the Driller's Log of the well drilled in the SE/4 of Section 6-9-28W, Sheridan County, Kansas, to the best of my knowledge and belief.

CHIEF DRILLING CO., INC.

Jim Robinson
Jim Robinson, Office Mgr.

Subscribed and sworn to before me this 20th day of August, 1969.

Betty Brandt
Betty Brandt, Notary Public

My Commission Expires:
May 9, 1971