

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Sheridan County. Sec. 17 Twp. 9S Rge. 26W (E) (W)

Location as "NE/CNW/SW" or footage from lines CN/2 SE NW

Lease Owner M. J. Bove Operating Co.

Lease Name Richards Well No. 4

Office Address 754 E. Wichita Ave., Russell, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Oil FOR

Date well completed January 2, 1959 19

Application for plugging filed June 22, 1968 19

Application for plugging approved June 24, 1968 19

Plugging commenced 7-1-68 19

Plugging completed 7-5-68 19

Reason for abandonment of well or producing formation Uneconomical

If a producing well is abandoned, date of last production 6-18-64 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Nichols

Producing formation L-K.C. Depth to top 3886 Bottom 4036 Total Depth of Well 4060 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
L-K.C.	Oil	3886	4036	8 5/8	300	none
				5 1/2	4060	1192

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from 4060 feet to surface feet for each plug set.

Sand from 4060 to 3750. Dumped 5 sacks cement. Shot pipe at 1192 and pulled from hole. Pumped 5 sacks hulls, 4 sacks jel and 100 sacks 50-50 pesmix. Followed with 20 sacks mud, 20 sacks cement, 6 sacks mud and 10 sacks cement, cap.

RECEIVED
STATE CORPORATION COMMISSION
JUL 22 1968
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Barnes & son
Address Russell, Kansas


STATE OF Kansas, COUNTY OF Russell, ss.
E. T. Drube

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
754 E. Wichita Ave., Russell, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 19th day of July, 1968

My commission expires January 5, 1969
Ruth E. Miller Notary Public.

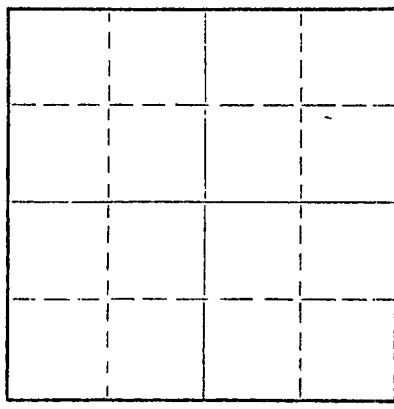

Locate well correctly on above Section Plat