

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Sheridan County, Sec. 24 Twp. 9 Rge. 28 (E) (W) X

Location as "NE/CNW/SW" or footage from lines NE NW NW

Lease Owner American Drilling Corporation

Lease Name Ochs Well No. 1

Office Address 360 Sutton Place Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) _____

Date well completed _____ 19__

Application for plugging filed 5-26-70 19__

Application for plugging approved 5-27-70 19__


Plugging commenced 5-29-70 19__

Plugging completed 6-11-70 19__

Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19__

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

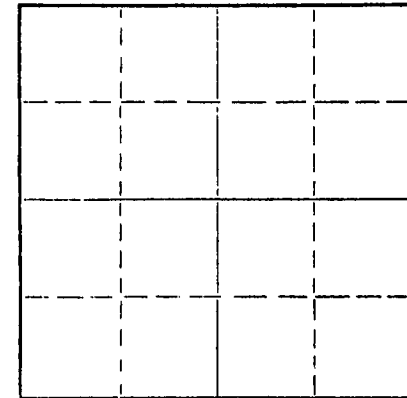

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well W. L. Nichols

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4167 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	FROM	TO	SIZE	PUT IN	PULLED OUT
			8 5/8	280	None
			4 1/2	4163	1539.30

RECEIVED
STATE CORPORATION COMMISSION
6-19-70
JUN 19 1970
CONSERVATION DIVISION
Wichita, Kansas

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Moved unit into location, rigged up pole and dug cellar.

Pushed plug to 3875, sanded to 3850' and dumped 3 sacks of cement. Started rigging up jacks.

Finished rigging up jacks. Shot casing at 3400' and working pipe.

Shot casing at 3,000, 2,500, 2,000 and 1,500. Worked casing loose. Laid down 38 joints of 4 1/2" Casing.

Loaded trailer, tore down rig and moved off location.

Squeezed well with 5 sacks of hulls, 30 sacks of mud and 130 sacks of 50/50 poz mix cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling Company, Inc.

Address P. O. Box 221 Great Bend, Kansas 67530

STATE OF Kansas, COUNTY OF Barton, ss.

James W. Rockhold (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)


James W. Rockhold

P. O. Box 221 Great Bend, Kansas

(Address)

SUBSCRIBED AND SWORN TO before me this 17 day of June, 1970

My commission expires _____



[Signature]

Notary Public.

GABBERT-JONES, INC.
WICHITA, KANSAS
DRILLERS' WELL LOG

RECEIVED
STATE CORPORATION COMMISSION
MAY 27 1970
CONSERVATION DIVISION
Wichita, Kansas

OCHS #1
NE NW NW Section 24-9S-28W
Sheridan County, Kansas

Commenced: November 2, 1968
Completed: November 10, 1968

OPERATOR - Glen N. Rupe

DEPTH		FORMATION	REMARKS
From	To		
0	185	Surface clay, shale and sand	
185	280	Shale	Ran 7 joints 8-5/8" casing, set @ 280' w/200 sacks cement.
280	1500	Shale	
1500	1735	Shale and shells	
1735	1835	Shale	
1835	2010	Shale and shells	
2010	2140	Sandy red bed	
2140	2378	Shale	
2378	2411	Anhydrite	
2411	2900	Shale	
2900	3750	Lime and shale	
3750	3890	Lime	
3890	3925	Lime and shale	
3925	4167	Lime	
4167	TD		Ran 103 joints 4-1/2" casing, set @ 4163' w/150 sacks cement.

I, E. E. HALL, certify this is a correct copy of the Drillers' Log for the well drilled in the NE NW NW Section 24-9S-28W, Sheridan County, Kansas, to the best of my knowledge and belief.

E. E. Hall
E. E. HALL

STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)

Before me, the undersigned, a Notary Public within and for said County and State, on this 14th day of November, 1968, personally appeared E. E. Hall to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and year last above written.

My Commission Expires Feb. 1, 1972

Barbara J. Layton
Barbara J. Layton, Notary Public

