


15-195-01487-00-00

DISTRICT CONSERVATION AGENT'S REPORT

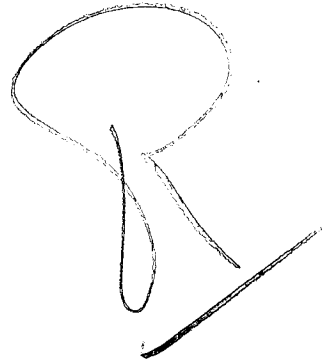

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. _____

LOCATION NE SW NW

SEC. 26 TWP. 11 RGE. 23^w

Dry Hole x Abandoned Oil Well _____ Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. 1 Lease Howatt

Operator B & R Drg Co Address Russell, Kans

Field _____ County Trego

Total Depth 3752 Feet.

(Describe briefly the manner in which the well was plugged)

8 5/8" at 181' Circulated with cement - 5 1/2" at 3752

with 100 sax cement behind - Lane Wells plugs to 3645
perforations at 3633',

Filled with chat to 3630', set 4 sax cement with dump

bailer, pulled 1100' 5 1/2", mud to 180', set rock and 15

sax cement, mud to 35', set rock and 10 sax cement to bottom
cellar.

RECORDED
SERIALIZED
1-15-1952
JAN 15 1952

Edwin Peery
District Conservation Agent

Date 1-9-52

PLUGGING
FILE SEC 26 TWP 11 R 23^w
BOOK PAGE 138 LINE 1

