


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Graham County. Sec. 38 Twp. 9 Rge. 25 (E) W (W)
100' EC NE NW

Location as "NE/CNW%SW%" or footage from lines...
Lease Owner James M. Stewart
Lease Name Bollig Well No. 1
Office Address Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 9/5/67 _____ 19____
Plugging completed 9/7/67 _____ 19____
Reason for abandonment of well or producing formation depleted.

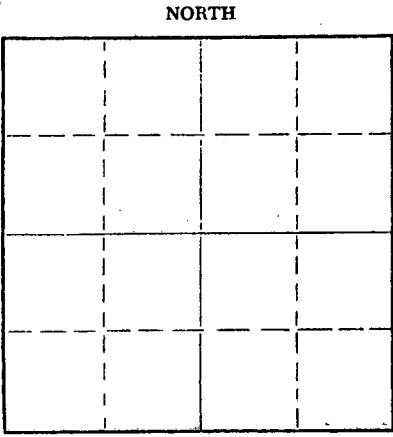

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Nichols
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4075 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	252'	none
				5-1/2"	4072'	2582'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked bottom, ran sand to 3890' and dumped 5 sacks of cement.
Loaded hole, shot pipe at 3262', 3095', 2931', 2766', 2602',
worked pipe loose and pulled 63 joints. Plugged well as follows:
1630' to 1310' 20 sacks gel and 100 sacks of cement, 1310' to 270'
22 sacks gel, 270' to 210' 20 sacks of cement, 210' to 30' 4 gel
and 30' to 0 8 sacks of cement. Tailed pipe, had welder cut off
braden head.

PLUGGING COMPLETE.

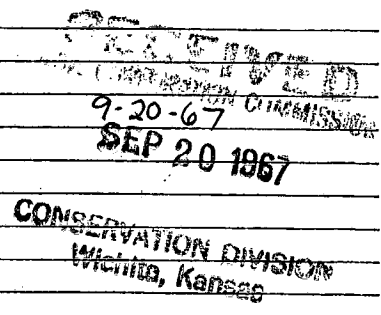


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KNIGHT CASING PULLING COMPANY
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.
NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight
CHASE, KANSAS
(Address)



SUBSCRIBED AND SWORN TO before me this 11th day of September, 1967
My commission expires February 15, 1971
Margaret Melcher Notary Public.

GABBERT-JONES, INC.
WICHITA, KANSAS
DRILLERS' WELL LOG

SOLLIG #1
100' E OF NE NW SECTION 28-9S-25W
GRAHAM COUNTY, KANSAS

AUG 30 1967

COMMENCED: MAY 27, 1967
COMPLETED: JUNE 6, 1967

OPERATOR - JAMES M. STEWART

DEPTH		FORMATION	REMARKS
FROM	TO		
0	165	CLAY AND SAND	RAN 13 JOINTS 8-5/8" CASING, SET @ 252' w/170 SACKS CEMENT.
165	252	SHALE	
252	1290	SHALE AND SHELLS	RAN 99 JOINTS 5 1/2" CASING, SET @ 4072' w/100 SACKS CEMENT.
1290	1470	SAND	
1470	2195	SHALE AND LIME	
2195	2260	ANHYDRITE	
2260	3005	SHALE AND LIME	
3005	3290	LIME	
3290	3878	LIME AND SHALE	
3878	4075	LIME	
4075	TD		

I, E. E. HALL, CERTIFY THIS IS A CORRECT COPY OF THE DRILLERS' LOG FOR THE WELL DRILLED 100' E OF NE NW SECTION 28-9S-25W, GRAHAM COUNTY, KANSAS, TO THE BEST OF MY KNOWLEDGE AND BELIEF.

E. E. Hall

E. E. HALL

STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)

BEFORE ME, THE UNDERSIGNED, A NOTARY PUBLIC WITHIN AND FOR SAID COUNTY AND STATE, ON THIS 8TH DAY OF JUNE, 1967, PERSONALLY APPEARED E. E. HALL, TO ME PERSONALLY KNOWN TO BE THE IDENTICAL PERSON WHO EXECUTED THE WITHIN AND FOREGOING INSTRUMENT AND ACKNOWLEDGED TO ME THAT HE EXECUTED THE SAME AS HIS FREE AND VOLUNTARY ACT AND DEED FOR THE USES AND PURPOSES THEREIN SET FORTH.

IN WITNESS WHEREOF, I HAVE HEREUNTO SET MY HAND AND OFFICIAL SEAL THE DAY AND YEAR LAST ABOVE WRITTEN.

Barbara J. Layton

BARBARA J. LAYTON, NOTARY PUBLIC

My Commission Expires February 1, 1968.