


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

Ellis County, Sec. 34 Twp. 11S Rge. (E) 18 (W)

Location as "NE/CNW%SW%" or footage from lines C NE SE NW  
Lease Owner Abercrombie Drilling, Inc.  
Lease Name BUTLER Well No. 1  
Office Address 801 Union Center, Wichita, Kans.  
Character of Well (completed as Oil, Gas or Dry Hole) Dry  
Date well completed August 9 19 65  
Application for plugging filed verbally August 9 19 65  
Application for plugging approved verbally August 9 19 65  
Plugging commenced August 9 19 65  
Plugging completed August 9 19 65  
Reason for abandonment of well or producing formation Dry

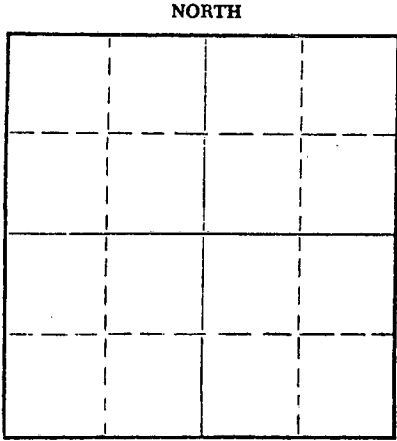

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? verbally - yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty, Hays, Kansas  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3741 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	248	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Set 1st plug at 530' w/20 sx cement  
Set 2nd plug at 240' w/20 sx cement  
Set 3rd plug at 30' w/ 8 sx cement  
Put 3 sx cement in rat hole.

**RECEIVED**  
STATE CORPORATION COMMISSION  
8-13-1965  
AUG 13 1965

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Abercrombie Drilling, Inc.  
Address 801 Union Center, Wichita, Kansas 67202

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
Mildred Saxton (employee of owner) or (owner/operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Mildred Saxton  
801 Union Center, Wichita, Kansas 67202  
(Address)

SUBSCRIBED AND SWORN to before me this 11th day of August, 19 65



My commission expires June 16, 1967

Leah Faye Hejke  
Notary Public.

15-051-30081-00-00

CONTRACTOR'S WELL LOG

COMPANY: Abercrombie Drilling, Inc.  
 CONTRACTOR: Abercrombie Drilling, Inc.  
 FARM: BUTLER #1  
 LOCATION: C NE SE NW Sec. 34-11S-18W  
 Ellis County, Kansas  
 COMMENCED: July 29, 1965  
 COMPLETED: August 9, 1965

0	60	Rock
60	255	Clay, shale & sand streaks
255	990	Rock & shale
990	1411	Shale & Shells
1411	1444	Anhydrite
1444	2234	Shale & Shells
2234	3132	Lime & shale
3132	3646	Lime
3646	3720	Lime & shale
3720	3741	Chert
	3741	Rotary Total Depth

Set 8-5/8" surface casing at 248' w/150 sx cement 3% CC. Cement circulated  
 DRY & ABANDONED

ELEVATION: 2122' K. B. & D. F.  
 2116' G. L.

FORMATION TOPS:

Heebner	3355'	(-1233)
Toronto	3377'	(-1255)
Lansing	3399'	(-1277)
Conglomerate	3682'	(-1560)
Total Depth	3741'	(-1619)

**RECEIVED**  
 STATE CORPORATION COMMISSION

8-13-1965  
 AUG 13 1965

STATE OF KANSAS )  
 ) SS  
 COUNTY OF SEDGWICK )

CONSERVATION DIVISION  
 Wichita, Kansas

I, Mildred Saxton, do hereby certify that the above and foregoing is a true and correct copy of the log of the BUTLER #1, C NE SE NW, Section 34-11S-18W Ellis County, Kansas, as reflected by the files of Abercrombie Drilling, Inc.

*Mildred Saxton*  
 Mildred Saxton, Secretary

Subscribed and sworn to before me, a Notary Public, in and for Sedgwick County, Kansas, this 11th day of August, 1965.

*Leah Faye Hefke*  
 Leah Faye Hefke, Notary Public

My commission expires June 16, 1967.

