


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

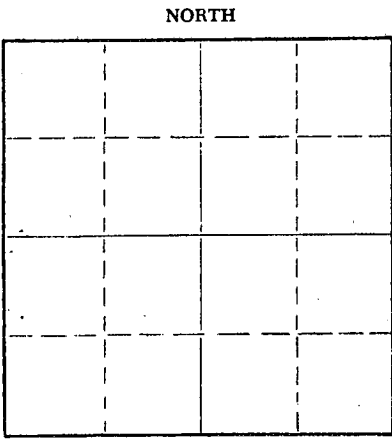

Locate well correctly on above Section Plat

Ellis County. Sec. 10 Twp. 11S Rge. (E) 18 (W)
Location as "NE/CNWxSWx" or footage from lines SE NW SW
Lease Owner Tilco, et al
Lease Name Meistrell Well No. 1
Office Address 815 Wichita Plaza, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 3-28 19 69
Application for plugging filed 3-28 19 69
Application for plugging approved 3-28 19 69
Plugging commenced 3-28- 19 69
Plugging completed 3-28 19 69
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3478 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	269'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Hole filled with mud. Squeeze 125 sx 50-50 Posmix with 6% gel

RECEIVED
STATE CORPORATION COMMISSION
4-7-1969
APR 7 1969
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Leben Drilling, Inc.
Address Box 486, Great Bend, Kansas 67530

STATE OF KANSAS, COUNTY OF BARTON, ss.

Leslie Kite (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Leslie Kite


(Address)

SUBSCRIBED AND SWORN TO before me this 28th day of March 19 69

My commission expires April 1, 1971

Ulanda Nichols

Ulanda Nichols
Notary Public.



DRILLER'S LOG

COMPANY	Tilco, et al
CONTRACTOR	LEBEN DRILLING, INC.
FARM	MEISTRELL #1
LOCATION	SE NW SW SECTION 10-11S-18W ELLIS COUNTY, KANSAS
COMMENCED	3-18-69
COMPLETED	3-28-69

0	80	Clay, Sand
80	190	Sand, Shale
190	269	Shale
269	680	Shale, Red Bed
680	860	Sand
860	1175	Shale, Red Bed
1175	1219	Anhydrite
1219	1988	Shale
1988	2340	Lime, Shale
2340	2536	Shale, Lime
2536	3410	Lime
3410	3440	Lime, Cherty
3440	3478	Lime
	<u>3478</u>	<u>RTD - D. & A.</u>

RECEIVED
STATE CORP. COMMISSION
4-7-1969
APR 7 1969
CONSERVATION DIVISION
Wichita, Kansas

8 5/8" 20# new surface casing set @ 269' cemented with 175 sacks Common cement, 2% cc

I, Leslie Kite, do hereby certify that the above and foregoing is a true and correct copy of the log of the Meistrell #1 Well, located SE NE SW of Section 10, Township 11 South, Range 18 West, Ellis County, Kansas, as reflected by the records of Leben Drilling, Inc.

Leslie Kite

Leslie Kite

STATE OF KANSAS)
) SS
COUNTY OF BARTON)

Subscribed and sworn to and before me, a Notary Public, in and for Barton County, Kansas, this 28th day of March, 1969.

Ulanda Nichols

Ulanda Nichols

