

15-051-03738-00-00

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Ellis County. Sec. 18 Twp. 11S Rge. 18W (E) (W)

Location as "NE/CNW%SW%" or footage from lines SW SW NW

Lease Owner Miller

Lease Name B. H. Hilburn Well No. 1

Office Address 1514 Mercantile Sec. Bldg, Dallas, Texas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 8/18 1963

Application for plugging filed 8/18 1963

Application for plugging approved 8/18 1963


Plugging commenced 8/18 1963

Plugging completed 8/18 1963

Reason for abandonment of well or producing formation No commercial quantities of oil or gas encountered

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

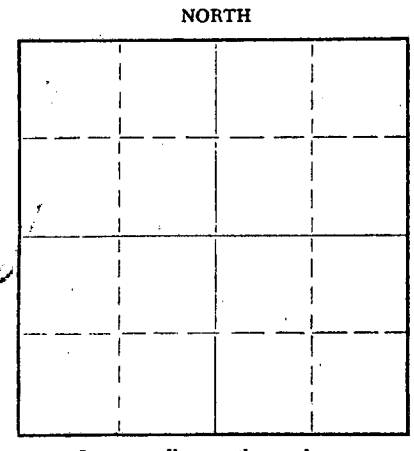

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty

Producing formation None Depth to top Bottom Total Depth of Well Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface	Water			8-5/8"	208'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Heavy mud was put into the hole to a depth of 540 feet where the bottom plug was set and cemented with 20 sacks cement. Mud was again put into the hole to a depth of 180 feet where the top plug was set and cemented with 20 sacks cement. Surface casing was out off below ground level and the location abandoned.

RECEIVED
STATE CORPORATION COMMISSION
8-26-1963
AUG 26 1963

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Tomlinson-Kathol, Inc.
Address 1125 Wichita Plaza, Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss. Richard C. Davis

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Richard C. Davis
1125 Wichita Plaza, Wichita, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 23rd day of August, 1963



Esther Lamone Notary Public

My commission expires 1/19/65

15-051-03738-00-00

DRILLERS LOG
B. H. HILBURN
1 MABEL MILLER
SW SW NW, SEC. 28-11S-18W
ELLIS COUNTY, KANSAS

Contractor - Tomlinson-Kathol, Inc.

Commenced: 8/9/63
Completed: 8/19/63
Elevation: 1985 KB

<u>From</u>	<u>To</u>	<u>Description</u>	<u>Remarks</u>
0	20	Clay	
20	80	Clay & Sand	
80	130	Shale - Sand	
130	208	Shale	219' 8-5/8" Surf. Csg. w/175 sacks cement
208	765	Shale & Sand	
765	854	Dakota Sand	
854	970	Sand	
970	1320	Shale	
1320	1327	Anhydrite	
1327	2377	Shale	
2377	2512	Lime	
2512	2710	Lime & Shale	
2710	2907	Shale & Lime	
2907	3013	Lime & Shale	Heebner 3218
3013	3172	Shale - Lime	Toronto 3241
3172	3513	Lime	Lansing 3261
3513	3542	Lime - Shale	Base K.C. 3499
3542	3550	Lime	Conglomerate
3550		Rotary Total Depth	Shale 3508
			Conglomerate
			Chert 3513

RECEIVED
STATE CORPORATION COMMISSION
8-26-1963
AUG 26 1963

CONSERVATION DIVISION
Wichita, Kansas

I certify to the best of my knowledge and belief, the above represents a true and accurate driller's log record of the captioned well.

Richard C. Davis

STATE OF KANSAS

SS

COUNTY OF SEDGWICK

Subscribed and sworn to before me this 23rd day of August, 1963.

Notary Public, Esther Lamone



My Commission Expires: 1/19/65