


15-065-00897-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

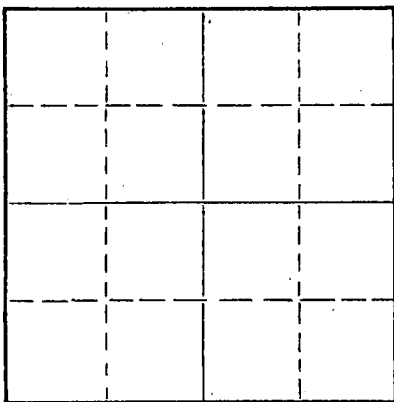

Locate well correctly on above
Section Plat

Graham County, Sec. 13 Twp. 9S Rge. 24W(E) (W)
Location as "NE/CNWxSWx" or footage from lines SW SW NW
Lease Owner K & E Drilling, Inc. - R. A. Cook
Lease Name Hildebrand Well No. #1
Office Address 1006 Central Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date well completed 1-8-56 19
Application for plugging filed 1-8-56 19
Application for plugging approved 1-8-56 19
Plugging commenced 1-8-56 19
Plugging completed 1-8-56 19
Reason for abandonment of well or producing formation
commercial quantities of oil not found
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____ Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
8				8 5/8	228'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy mud to 210'. Set wooden plug with 15 sacks cement. Second plug at 40' and capped with 10 sacks cement.

(If additional description is necessary, use BACK of this sheet)
K & E DRILLING, INC.


Name of Plugging Contractor
Address 1006 Central Bldg., Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Dale Silcott (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dale Silcott
1006 Central Bldg., Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 11th day of January, 1956

My commission expires June 25, 1956 Notary Public.



1-12-56

K & E DRILLING, INC. - R. A. COOK
Hildebrand No. 1

SW SW NW Section 13-9S-24W
Graham County, Kansas

Comm: Jan. 1, 1956
Comp: Jan. 8, 1956

Total Depth: 4030'

Casing Cement
228' 8 5/8 150 sacks.

<u>FORMATION</u>	<u>DEPTH</u>
Soil & clay	0 - 104
Shale	104 - 1170
Shale - shells	1170 - 1585
Sand - shale	1585 - 1820
Shale - shells	1820 - 2090
Anhydrite	2090 - 2125
Shale & shells	2125 - 2300
Shale & shells	2300 - 2515
Shale & lime	2515 - 3850
Lime	3850 - 4030

State of Kansas)
) SS
Sedgwick County,)

I hereby certify that the above information is true and correct to the best of my knowledge.

Walter H. ...

Subscribed and sworn to before me this 11th day of January, 1956.

My commission expires: June 25, 1956.

Frances ...

Notary Public

PLUGGING
FILE SEC 13 T 9 R 24W
BOOK PAGE 30 LINE 39

STATE OF KANSAS
NOTARY PUBLIC
JAN 11 1956