

15-051-20377-00-01

State of Kansas

NOTICE OF INTENTION TO DRILL

(see rules on reverse side)

CARD MUST BE TYPED

CARD MUST BE SIGNED

Starting Date: 6/25/84 month day year

API Number 15-051-20,377-A

OPERATOR: License # 5198 Name A. Scott Ritchie Address 125 N. Market, Suite 950 City/State/Zip Wichita, Kansas 67202 Contact Person Jeff Christian Phone 316/267-4375

SE SW SE Sec 19 Twp 11 S, Rge 20 (location) 330 Ft North from Southeast Corner of Section 1650 Ft West from Southeast Corner of Section (Note: Locate well on Section Plat on reverse side)

CONTRACTOR: License # 5104 Name Blue Goose Drilling, Inc. City/State Great Bend, Ks. 67530

Nearest lease or unit boundary line 330 feet. County Ellis Lease Name Vance OWWO Well# 1

Well Drilled For: Well Class: Type Equipment: Oil Swd Infield Mud Rotary Gas Inj Pool Ext Air Rotary OWWO Expl Wildcat Cable

Domestic well within 330 feet: yes no Municipal well within one mile: yes no

If OWWO: old well info as follows: Operator Glickman-Executive Pet. Well Name #1 Vance Comp Date 1/9/69 Old Total Depth 3872' Projected Total Depth 3872' feet Projected Formation at TD Arbuckle Expected Producing Formations Topeka, Lansing-Kansas City

Depth to Bottom of fresh water 70 feet Lowest usable water formation Dakota Depth to Bottom of usable water 725 feet Surface pipe by Alternate: 1 2 set 208 feet Conductor pipe if any required Ground surface elevation 2224 feet MSI This Authorization Expires 12-20-84 Approved By 6-20-84

I certify that we will comply with K.S.A. 55-101, et seq., plus eventually plugging hole to K.C.C. specifications.

Date 6/20/84 Signature of Operator or Agent Jeff Christian Title Geologist

MHC/KDHE 6-20-84


Must be filed with the K.C.C. five (5) days prior to commencing well
 This card void if drilling not started within six (6) months of date received by K.C.C.

RECEIVED
 STATE CORPORATION COMMISSION
 6-20-1984
 JUN 20 1984

Important procedures to follow:

A Regular Section of Land
 1 Mile = 5,280 Ft.

CONSERVATION DIVISION
 Wichita, Kansas

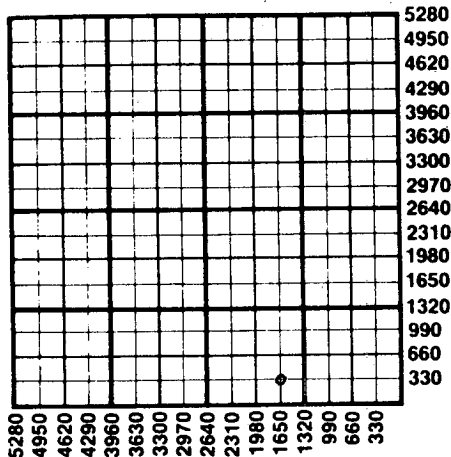

1. Notify District office before setting surface casing.
2. Set surface casing by circulating cement to the top.
3. File completion forms ACO-1 with K.C.C. within 90 days of well completion, following instructions on ACO-1, side 1, and including copies of wireline logs.
4. Notify District office 48 hours prior to old well workover or re-entry.
5. Prior to plugging, prepare a plugging plan, then obtain agreement from the appropriate district office for an approved plugging plan.
6. Submit plugging report (CP-4) to K.C.C. after plugging is completed.
7. Obtain an approved injection docket number before disposing of salt water.
8. Notify K.C.C. within 10 days when injection commences or terminates.
9. If an alternate 2 completion, cement in the production pipe from below any usable water to surface within 120 days of spud date.

State Corporation Commission of Kansas
 Conservation Division
 200 Colorado Derby Building
 Wichita, Kansas 67202
 (316) 263-3238