


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Trego County, Sec. 2 Twp. 11S Rge. 22 E/W  
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines  
SE NW.  
Lease Owner F & M Oil Company  
Lease Name HILGERS Well No. 1  
Office Address 422 Union Center, Wichita, Kansas  
Character of Well (Completed as Oil, Gas or Dry Hole)  
Dry Hole

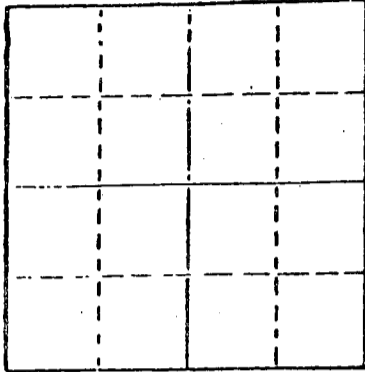

Locate well correctly on above  
Section Plat

Date Well completed 09-29-1980  
Application for plugging filed 09-29-1980  
Application for plugging approved 09-29-1980  
Plugging commenced 09-29-1980  
Plugging completed 09-29-1980  
Reason for abandonment of well or producing formation  
No commercial quantity of oil or gas available  
If a producing well is abandoned, date of last production  
19

Was permission obtained from the Conservation Division or  
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Balthazar  
Producing formation Depth to top Bottom Total Depth of Well 3830'  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid  
was placed and the method or methods used in introducing it into the hold. If cement or other  
plugs were used, state the character of same and depth placed, from feet to  
feet for each plug set.

T.D. 3830'  
Set 1st plug @ 860' with 70 sx.  
2nd plug @ 240' with 25 sx.  
3rd plug @ 40' solid bridge with 10 sx.  
Rathole with 5 sx. 50/50 posmix, 6% gel.

Plug was down @ 10:45 p.m. 09-29-80



(If additional description is necessary, use BACK of this sheet.)

Name of Plugging Contractor Abercrombie Drilling, Inc.

STATE OF Kansas COUNTY OF Sedgwick, ss.  
Jack L. Partridge, Asst. Sec.-Treas. (employee of owner) or (owner or operator)  
of the above-described well, being first duly sworn on oath, says: That I have knowledge of  
the facts, statements, and matters herein contained and the log of the above-described well  
as filed and that the same are true and correct. So help me God.

(Signature) Jack L. Partridge  
801 Union Center, Wichita, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 2nd day of October, 1980

Jeanette A. Metheny  
Jeanette A. Metheny Notary Public.

My commission expires 08-18-84



15-195-20713-00-00

CONTRACTOR'S WELL LOG

OPERATOR:	F & M Oil Company
CONTRACTOR:	Abercrombie Drilling, Inc.
WELL NAME:	HILGERS #1
LOCATION:	SE NW, Section 2-11S-22W Trego County, Kansas
SPUD DATE:	09-23-80
COMPLETION DATE:	09-29-80

0	1649	Sand & Shale
1659	1734	Anhydrite
1734	1951	Shale
1951	3830	Shale & Lime
	3830	Rotary Total Depth

Spud hole @ 3:00 p.m. 09-23-80. Drilled 266' of a 12-1/4" hole. Ran 6 joints of 8-5/8" 23# casing (tally 256.94') Set @ 263.44'. Cemented with 180 sx. of common, 2% gel, 3% c.c. Plug was down @ 8:00 p.m. 09-23-80. Cement did circulate.

T.D. 3830'. Set 1st plug @ 860' with 70 sx. 2nd plug @ 240' with 25 sx., 3rd plug @ 40' with solid bridge with 10 sx. Rathole with 5 sx. 50/50 posmix, 6% gel. Cement by Sun Cementing. Plug was down @ 10:45 p.m. 09-29-80.

SAMPLE TOPS:

Anhydrite 1690'  
B/Anhydrite 1734'

STATE OF KANSAS )  
                          ) SS  
COUNTY OF SEDGWICK )

Jack L. Partridge, Assistant Secretary-Treasurer of Abercrombie Drilling, Inc. does hereby state that the above and foregoing is a true and correct copy of the log of the HILGERS #1, SE NW, Section 2-11S-22W, Trego County, Kansas.

ABERCROMBIE DRILLING, INC.

BY Jack L. Partridge  
Jack L. Partridge, Asst. Sec.-Treas.

Subscribed and sworn to before me, a Notary Public, in and for the aforesaid county and state as of this 2nd day of October, 1980.

Jeanette A. Metheny  
Jeanette A. Metheny, Notary Public

