


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

Ellis County. Sec. 4 Twp. 11 Rge. 20 (E) W (W)

Location as "NE/CNW%SW%" or footage from lines NW NW SW
Lease Owner C-G Drilling Co. & Holly Oil Company
Lease Name Keller "B" Well No. 1-A
Office Address 107 Rule Building, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 12-9 1954
Application for plugging filed 12-9 1954
Application for plugging approved 12-9 1954
Plugging commenced 12-9 1954
Plugging completed 12-9 1954
Reason for abandonment of well or producing formation Too low structurally

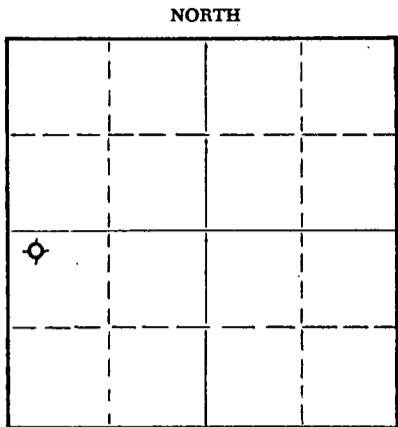

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production -- 19--
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty, Nays, Kansas
Producing formation -- Depth to top -- Bottom -- Total Depth of Well 3673 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	182.45	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from -- feet to -- feet for each plug set.

Filled hole with mud to 175'; set plug;
1/2 sack hulls, 15 sacks cement. Filled hole
with mud to 40'; set plug then filled to top
with 10 sacks cement, 1/2 sack hulls.

12-16-1954

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor C-G Drilling Co.
Address 107 Rule Building, Wichita, Kansas


STATE OF KANSAS COUNTY OF SEDGWICK, ss.
Vicky Jacobs (employee of owner) or ~~(owner or operator)~~ of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Vicky Jacobs Office Manager
107 Rule Building, Wichita, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 13th day of December, 1954

Barbara Donaldson Notary Public.

My commission expires June 17, 1957



15-051-19220-00-00

CONTRACTOR'S WELL LOG

OPERATOR C-G Drilling Co. & Holly Oil Co. FARM NAME Keller "B" 1-A

LOCATION NW NW SW, Section 4-11-20W

POOL NAME Wildcat COUNTY Ellis STATE Kansas

COMMENCEMENT DATE 11-29-54 COMPLETION DATE 12-9-54

LOG OF WELL

Elevation: 2051 R.B.

All measurements from the top of rotary bushing.

FROM	TO	FORMATION	DEVIATION FROM VERTICAL	REMARKS:
0	182	Shale-Shells		
182	500	Shale-Shells		
500	1250	Shale-Shells		
1250	1505	Shale-Shells	0° - 1500'	
1505	1545	Anhydrite		
1545	1570	Shale-Shells		
1570	1820	Shale-Shells		
1820	2015	Lime-Shale	0° - 2000'	
2015	2200	Shale-Shells		
2200	2330	Shale-Shells		
2330	2445	Lime-Shale		
2445	2650	Lime-Shale	0° - 2500'	
2650	2795	Shale-Shells		
2795	2865	Lime-Shale		
2865	3020	Lime-Shale	0° - 3000'	
3020	3230	Lime-Shale		
3230	3308	Lime-Shale		
3308	3394	Lime-Shale		
3394	3463	Lime-Shale		
3463	3505	Lime-Shale	0° - 3500'	
3505	3590	Lime-Shale		
3590	3660	Lime-Shale		
3660	3673	Lime-Shale		

CASING LEFT IN HOLE AFTER COMPLETION

Run 182.45' of 8-5/8" Surface Casing.

STATE OF KANSAS }
COUNTY OF SEDGWICK } ss.

The undersigned certifies that to the best of her knowledge and belief, the above facts are true and correct.

C-G DRILLING CO.

By Vicky Jacobs
Office Manager

Subscribed and sworn to before me this 13th day of December, 1954.

My commission expires: June 17, 1957

Barbara Donaldson
Notary Public

