


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

15-051-20706-00-00

Form CP-4

WELL PLUGGING RECORD

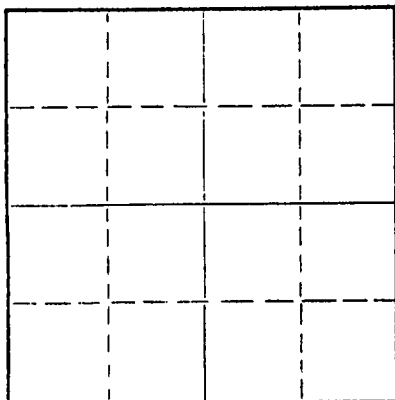

Locate well correctly on above
Section Plat

Ellis County, Sec. 17 Twp. 11S Rge. 20W (E) (W)
Location as "NE/CNW%SW%" or footage from lines NW NE NW
Lease Owner Beacon Resources Corporation
Lease Name Denning Well No. 1
Office Address 1000 Century Plaza - Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) dry
Date well completed 12-20 19 70
Application for plugging filed 12-20 19 70
Application for plugging approved 12-20 19 70
Plugging commenced 3:15 PM 12-20 19 70
Plugging completed 4:30 PM 12-20 19 70
Reason for abandonment of well or producing formation dry

If a producing well is abandoned, date of last production none 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Leo Massey - Hays, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3355 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		228		8 5/8	228	0

RECEIVED
STATE CORPORATION COMMISSION
DEC 23 1970
CONSERVATION DIVISION
Wichita, Kansas

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plug @ 500' w/ 70 sx - Plug @ 200' w/20 sx Plug &
bridge to hold up kelly @ 40' & 10 sx 2 sx in rat hole
by Dowell

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor B & B Drilling, Inc.
Address 720 Union Center - Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.

Bill Lahar (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Bill Lahar

720 Union Center - Wichita, Kansas

(Address)

22nd day of December, 19 70


Alma A. Neises

Alma A. Neises

Notary Public.

May 31, 1974

My commission expires



15-051-20706-00-00

B & B DRILLING, INC.

207 Petroleum Building
Wichita, Kansas 67202

December 22, 1970

DRILLERS LOG

Re: Denning #1
NW NE NW Section 17-11S-20W
Ellis County, Kansas

OPERATOR:
CONTRACTOR:
COMMENCED:
COMPLETED
TOTAL DEPTH:

Beacon Resources Corp.
B & B Drilling, Inc.
December 16, 1970
December 20, 1970
3355'

Ran 8 5/8" @ 228' w/160 BX

0	228
228	520
520	1460
1460	1467
1467	1513
1513	1880
1880	2155
2155	2425
2425	3218
3218	3345
3345	3355
3355	

Soil
Shale
Shale & Sand
Shale
Anhydrite
Shale
Shale & Lime
Lime & Shale
Shale & Lime
Shale & Lime
Lime
Total Depth

D & A

RECEIVED
STATE CORPORATION COMMISSION
DEC 23 1970
CONSERVATION DIVISION
Wichita, Kansas

We certify the above and foregoing to be true and correct copy of the log on the #1 Denning, located in Ellis County, Kansas.

Bill Lohar President

Alma A. Neises Notary Public
Subscribed and sworn to before me
this 22nd day of December, 1970.
My commission expires May 31, 1974

