


STATE OF KANSAS
STATE CORPORATION COMMISSION

15-195-01486-00-00

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

NORTH

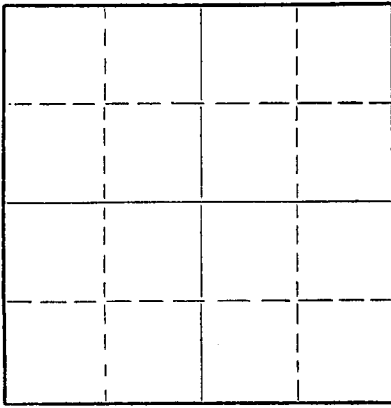

Locate well correctly on above
Section Plat

Trego County. Sec. 26 Twp. 11 Rge. 23 (E)/ (W)

Location as "NE/CNW/SW" or footage from lines CW 1/2 W 1/2 NE 1/4

Lease Owner Smoky Hill Petroleum, Inc.

Lease Name Howatt Well No. 1

Office Address Russell, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed 8-31-49 19

Application for plugging filed 19

Application for plugging approved 4-2-52 19

Plugging commenced 3-25-52 19

Plugging completed 3-25-52 19

Reason for abandonment of well or producing formation Depleted Oil

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty

Producing formation Depth to top Bottom Total Depth of Well 3666 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 1/8"	200'	
				5 1/2"	3663'	2800'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

8 5/8" at 250' circulated with cement - 5 1/2" at 3663' with 100 sacks cement behind - Set 5 sacks cement in bottom with dump bailer - bridged hole at 3100' set 5 sacks cement with dump bailer - pulled 2800' 5 1/2" - filled hole with mud to 240', set rock bridge and 15 sacks cement - mud to 35' - set rock and 10 sacks cement to bottom cellar.

RECEIVED
8-11-1952
AUG 11 1952
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor
Address

STATE OF Kansas, COUNTY OF Russell, ss.
H. B. Shumaker (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Herbert B. Shumaker
President

(Address)

SUBSCRIBED AND SWORN to before me this 9th day of August, 1952
Paul Dalton
Notary Public.

My commission expires June 20, 1953

24-2675-S 2-52-20M

PLUGGING
FILE 816-26-11R-230
BOOK PAGE 6-1-2

15-195-01486-00-00


WELL LOG BUREAU -- KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

Company - EL CAPITAN OIL CO.
Farm - Howatt "B" No. 1

SEC. 26 T. 11 R. 23W
CWL NE

Total Depth. 3681 PB 3666
Comm. 6-24-49 Comp. 8-31-49
Shot or Treated. Acid w/1000 gals.
Contractor. Russell Drilling Co.
Issued. 12-17-49

County. Trego
KANSAS



CASING:

8 1/2" 200'
5 1/2" 3663'

Elevation. _____

Production. Dry

Figures Indicate Bottom of Formations.

soil, clay	75
shale, shells	520
sand, shale	780
shale, shells	865
anhydrite	910
shale, shells, pyrite	1005
shale, shells	1030
lime, shale	1070
shale, shells, red rock	1330
red rock, shale, shells	1820
shale, shells	1845
lime, shale	2125
shale, lime shells	2250
shale, lime	2755
lime	2775
lime, shale	2877
lime sdy	2899
lime, shale	3070
lime	3140
lime, shale	3430
lime brkn	3475
lime, K, C.	3681
Total Depth PB 3666	

RECEIVED
STATE CONSERVATION COMMISSION
10-14-1950
OCT 14 1950
CONSERVATION DIV
Wichita, Kans.

RECEIVED
STATE CONSERVATION COMMISSION
10-14-1950
OCT 14 1950
CONSERVATION DIV
Wichita, Kans.

PLUGGING
WELL NO. 26 T. 11 R. 23W
BOOK PAGE 36