


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Trego County, Sec. 31 Twp. 11S Rge. ~~xxxxx~~ 23 (W)

Location as "NE/CNW/SW" or footage from lines NW NW NW
Lease Owner Murfin-Rains & Williamson
Lease Name Osborn OSBOURNE ES 5/11/09 Well No. 1
Office Address 617 Union Center, Wichita 2, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed August 17 19 58
Application for plugging filed August 17 19 58
Application for plugging approved August 17 19 58
Plugging commenced August 17 19 58
Plugging completed August 17 19 58
Reason for abandonment of well or producing formation Dry Hole

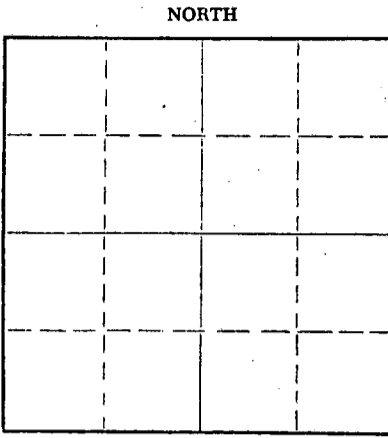

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well _____
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4600 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	215'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plug hole with 1st plug at 540'
with 20 sxs. cement. 2nd plug
at 200' with 20 sxs. cement.
Top plug at 40' with 1/2 sx.
hulls, 10 sxs. cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Murfin Drilling Company
Address 617 Union Center, Wichita 2, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
W. R. Murfin (employer or owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W R Murfin
617 Union Center, Wichita 2, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 8th day of September, 19 58
March 23, 1960
My commission expires _____



Donna M. Matzek Notary Public.

PLUGGING
FILE SEC 31 T. 11 R. 23W
BOOK PAGE 127 LINE 15

RECEIVED
CORPORATION COMMISSION
9-9-1958
SEP 9 1958

N DIVISION
Kansas

WELL LOG

COMPANY Murfin-Rains & Williamson

SEC. 31 T. 11S R. 23W

FARM ~~Osborn~~ OSBOURNE NO. 1

LOC. NW NW NW

OS 3/11/09

TOTAL DEPTH 4600'

COUNTY Trego KANSAS


COMM. 8-5-58

COMP. 8-17-58

SHOT OR TREATED

CONTRACTOR Murfin Drilling Company

ISSUED



CASING

20	10
15	8 5/8" @ 215' w/150 sxs.
12	6
13	5

ELEVATION 2443 K. B.

2441 D. F.

PRODUCTION D & A

FIGURES INDICATE BOTTOM OF FORMATIONS

215	Surface Hole
650	Shale
1000	Shale - Shells
1070	Sand
1220	Shale - Shells
1315	Sand
1540	Shale - Shells
1720	Sand
2015	Red Bed
2050	Anhydrite
2200	Shale & Shells 3796
3790	Lime - Shale
4195	Lime
4270	Lime & Chert
4360	Lime
4377	Conglomerate
4400	Lime & Chert
4406	Lime
4435	Lime & Chert
4455	Lime
4483	Lime & Chert
4510	Lime
4544	Lime & Chert
4585	Lime-Sand Lime
4600	Lime

GEOLOGICAL TOPS:

Heebner	3796
Toronto	3817
Lansing-Kansas City	4074
Conglomerate	4307
Mississippi Chert	4376
Mississippi Lime	4419
Viola	4479
Simpson	4560
Arbuckle	4564
Total Depth	4600

RECEIVED

STATE COMMISSION COMMISSIONER

SEP 9 1958

PLUGGING

FILE SEC 31 T. 11 R. 23W
BOOK PAGE 127 LINE 15

DIVISION

GAS

State of Kansas

County of Sedgwick


SS:

I, W. R. Murfin of the Murfin Drilling Company

upon oath state that the above and foregoing is a true and correct copy of the log of the Osborn #1 well.

Subscribed and sworn to before me this 8th day of September, 1958.

My Commission Expires: March 23, 1960



W. R. Murfin

Donna M. Matzek
NOTARY PUBLIC
Donna M. Matzek