

15-195-01111-00-00


STATE OF KANSAS
STATE CORPORATION COMMISSION
Give All Information Completely
Make Required Affidavit
Mail Deliver Report to:
Conservation Division
State Corporation Commission
No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Trego County. Sec. 21 Twp. 11 S Rge. (E) 24 (W)
Location as "NE/CNW&SWK" or footage from lines 1830 FSL and 1980⁺ FWL
Lease Owner Phillips Petroleum Company
Lease Name Malinowsky Well No. 2
Office Address Box 287 - Great Bend, Kansas.
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed January 31, 1962
Application for plugging filed January 31, 1962
Application for plugging approved February 5, 1962
Plugging commenced February 1 1962
Plugging completed February 1 1962
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Mr. Eldon Petty
Producing formation Depth to top Bottom Total Depth of Well Feet
Show depth and thickness of all water, oil and gas formations.

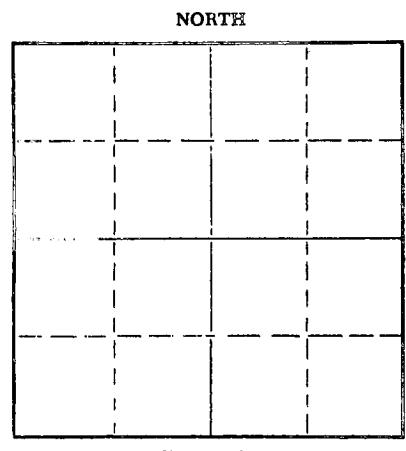

Locate well correctly on above Section Plat

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Howard	Dry	3612		8 5/8"	209.78	None
Topeka	Dry	3646				
Heebner	Dry	3838				
Toronto	Dry	3860				
LKC	Dry	3875				
Drum	Dry	4016				
Base LKC	Dry	4112				

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Mudded hole from 4115' to 550'. Set Howco wood plug at 550'. Dumped 20 sx. cement to 480'. Mudded hole to 180'. Set Howco wood plug at 180' with 1/2 sx. hulls. Dumped 20 sx. cement to 120'. Mudded hole to 35'. Set wood plug at 35' with 1/2 sx. hulls. Dumped 10 sx. cement in filling to base of cellar.

RECEIVED
COMMISSION

2-9-1967
FEB 9 1967

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Garvey Drilling Co. & Howco
Address Great Bend, Ks.

STATE OF KANSAS, COUNTY OF BARTON, ss.
M. E. Michael (employee of owner) or (~~owner~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) M. E. Michael
Box 287 - Great Bend, Kansas.
(Address)

SUBSCRIBED AND SWORN TO before me this 8th day of February, 1962.

My commission expires 11/18/65

Joseph M. Beal
Notary Public

COMPANY PHILLIPS PETROLEUM COMPANY

SEC. 21 T. 11S R. 24W

FARM MALINOWSKY NO. 2


LOC. C-NE, SW

TOTAL DEPTH 4115'

COUNTY TREGO CO., KANSAS

COMM. January 23, 1962 COMP. February 1, 1962

CONTRACTOR GARVEY DRILLING COMPANY



CASING 8-5/8" @ 217.60' w/100 sax.

ELEVATION

PRODUCTION D & A

FIGURES INDICATE BOTTOM OF FORMATIONS

70	Clay & sand
218	Clay & shale
1150	Shale
1350	Sand & shale
1475	Shale
1625	Red bed
1870	Sand & shale
2130	Red bed & shale
2155	Anhydrite
2560	Shale
2690	Shale & shells
2900	Shale & lime
2966	Lime & shale
3260	Shale & lime
3810	Lime & shale
4115	Lime
4115	T. D.

RECEIVED
STATE CORPORATE COMMISSION
2-9-1962
FEB 9 1962
CONSERVATION DIVISION
Wichita, Kansas

State of KANSAS
County of BARTON } ss

I, VERNE A. MORRIS of GARVEY DRILLING COMPANY

upon oath state the above and foregoing is a true and correct copy of the log of the #2 MALINOWSKY well.

Verne A. Morris

Subscribed and sworn to before me this 7th day of February 19 62

My Commission Expires: November 12, 1962

Gransbury
NOTARY PUBLIC