


15-195-20065-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

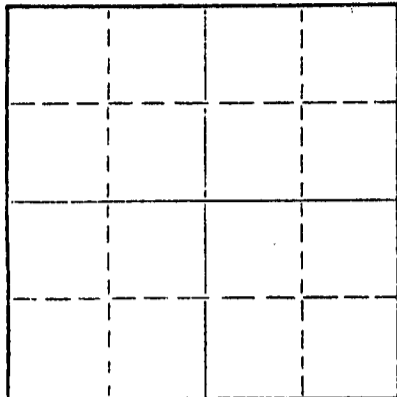

Locate well correctly on above
Section Plat

Trego County, Sec. 13 Twp. 11 Rge. 24 (E) W (W)
Location as "NE/CNWxSWx" or footage from lines SE NW NW
Lease Owner Dreiling Oil, Inc.
Lease Name Littlechild Well No. 4
Office Address Rt. # 2, Victoria, Kansas 67671
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed 3-13- 19 68
Application for plugging filed 5-21 19 72
Application for plugging approved 5-23 19 72
Plugging commenced 6-7 19 72
Plugging completed 6-7 19 72
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production April 30 19 72
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Bill Nichols Morland, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3,975' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface Pipe				8 5/8"	170'	none
Casing				4 1/2"	3975'	1625

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged with 5 sacks Halls, 25 Gel, 150 cu ft, cement, Max. Pressure 250#, 75# Shut in.

RECEIVED
STATE CORPORATION COMMISSION
6-9-1972
JUN 9 1972

CONSERVATION DIVISION
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Dreiling Oil, Inc.
Address Victoria, Kansas 67671

STATE OF KANSAS, COUNTY OF ELLIS, ss.
I, Joe Hess, Sec. Treas. of Drlg. Contrc. (employee of contractor) of the above-described well, being first duly sworn on oath, says: 'That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Joe Hess
JOE HESS, RT.#2, Victoria, Kansas 67671
(Address)

Subscribed and sworn to before me this 8th day of June, 19 72



Patty Rohr
PATTY ROHR Notary Public.

July 20, 1975

15-195-20065-00-00

L. J. DREILING and SONS, Inc.

VICTORIA, KANSAS

WELL LOG

Company Leo J. Dreiling Oil Company
Route 2
Victoria, Kansas 67671

Sec. 13 Twp. 11 Rng. 24

Farm Littlechild No. 4

Location SE-NW-NW

Total Depth 3975'

County Trego

Comm. 3-6-68 Comp. 3-13-68

2361' K.B.

L. J. Dreiling & Sons, Inc.

Elevation: 2358' D. F.

Contractor Route 2
Victoria, Kansas 67671

2356' G.R.

Casing Record

Cement Record

170' - 8 5/8"
3974' - 4 1/2"

125 sacks cement
200 sacks cement
with 10 bbls. salt
flush

Production:

RECEIVED
STATE CORPORATION COMMISSION
5-23-1972
MAY 23 1972
CONSERVATION DIVISION
Topeka, Kansas

Figures Indicate Bottom of Formations

0'	40'	Surface Soil, Clay & Sand
40'	60'	Gravel
60'	170'	Shale
170'	280'	Shale
280'	1054'	Shale & Sand
1054'	1480'	Shale & Sand
1480'	1705'	Sand
1705'	1955'	Redbed & Shale
1955'	1999'	Anhy.
1999'	2100'	Shale & Shells
2100'	2475'	Lime & Shale
2475'	2755'	Shale & Lime
2755'	2940'	Lime & Shale
2940'	3130'	Lime & Shale
3130'	3345'	Lime & Shale
3345'	3500'	Lime & Shale
3500'	3636'	Lime
3636'	3760'	Lime
3760'	3860'	Lime
3860'	3865'	Lime
3865'	3885'	Lime
3885'	3910'	Lime
3910'	3925'	Lime
3925'	3975'	Lime
3975'	T.D.	

STATE OF KANSAS)

)ss


COUNTY OF ELLIS)

I, Leo F. Dreiling, of the L. J. Dreiling & Sons, Inc., upon oath states that the above and foregoing is a true and correct copy from the Daily Drilling Report from your Littlechild #4.

Leo F. Dreiling
LEO F. DREILING

Subscribed and sworn to before me this 14th day of March 1968.

Joseph A. Hess
JOSEPH A. HESS NOTARY PUBLIC



My commission expires: September 19, 1970