

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Russell County. Sec. 19 Twp. 11S Rge. 13 NE/W  
Location as "NE/CNW SW 1/4" or footage from lines  
SW SE SW

Lease Owner Rains & Williamson Oil Co., Inc.  
Lease Name Shaffer Well No. #1


Office Address 435 Page Court, 220 W. Douglas, Wichita, Ks.  
Character of Well (Completed as Oil, Gas or Dry Hole) Dry Hole

Date Well completed 10-14-81 1981  
Application for plugging filed 10-13-81 1981  
Application for plugging approved 10-13-81 1981  
Plugging commenced 10-13-81 1981  
Plugging completed 10-14-81 1981

Reason for abandonment of well or producing formation  
Commercial quantities of oil not found  
If a producing well is abandoned, date of last production  
19

Was permission obtained from the Conservation Division or  
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Delbert Schmidt  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3760'  
Show depth and thickness of all water, oil and gas formations.

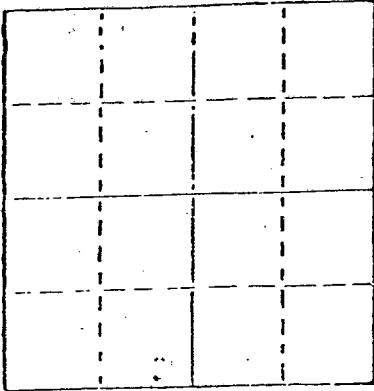

Locate well correctly on above  
Section Plat

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	245'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid  
was placed and the method or methods used in introducing it into the hold. If cement or other  
plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_  
feet for each plug set.

- Plug @ 660' w/70 sx.
- Plug @ 240' w/40 sx.
- Plug @ 40' w/10 sx.
- Rat Hole 5 sx.

RECEIVED  
STATE CORPORATION COMMISSION  
10-26-1981  
OCT 26 1981

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this report.)  
Name of Plugging Contractor Rains & Williamson Oil Co., Inc.

STATE OF Kansas COUNTY OF Sedgwick, ss.  
Wilson Rains, President of Rains & Williamson Oil Co., (employee of owner) or (owner or operator)  
of the above-described well, being first duly sworn on oath, says: That I have knowledge of  
the facts, statements, and matters herein contained and the log of the above-described well  
as filed and that the same are true and correct. So help me God.

(Signature) Wilson Rains  
435 Page Court, 220 W. Douglas, Wichita, Ks. 67202  
(Address)

SUBSCRIBED AND SWORN TO before me this 23 day of October, 19 81

Juanita M. Green  
Notary Public.



My commission expires 10-4-83

DRILLER'S LOG

COMPANY: Rains & Williamson Oil Co., Inc.

SEC. 19 T. 11S R. 13W

WELL NAME: Shaffer #1

LOC. SW SE SW

COUNTY: Russell

RIG NO. #9

TOTAL DEPTH 3760'

ELEVATION 1833 GL 1838 KB

COMMENCED: 10-4-81

COMPLETED: 10-14-81

CONTRACTOR: Rains & Williamson Oil Co., Inc.

CASING RECORD:

SURFACE: 8 5/8" @ 245' w/170 sx. common, 2% gel, 3% cc.

PRODUCTION: D&A

LOG

(Figures Indicate Bottom of Formations)

Shale	941
Shale & Lime	2758
Lime	3309
Lime & Shale	3550
Lime	3635
Shale & Lime	3715
Lime	3760
<u>ROTARY TOTAL DEPTH</u>	<u>3760</u>

RECEIVED  
 STATE CORPORATION COMMISSION  
 10-26-1981  
 OCT 26 1981  
 CONSERVATION DIVISION  
 Wichita, Kansas

STATE OF Kansas)

COUNTY OF Sedgwick)

SS:

I, Wilson Rains, President of Rains & Williamson Oil Co., Inc.

upon oath state that the above and foregoing is a true and correct copy of the log of the

Shaffer #1 well.

*Wilson Rains*

Wilson Rains

Subscribed and sworn to before me this 23 day of October, 1981.

My Appointment Expires:

10-4-83

*Juanita M. Green*

Juanita M. Green

