

STATE OF KANSAS
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

RECEIVED
STATE CORPORATION COMMISSION
DEC 15 1980
CONSERVATION DIVISION
Wichita, Kansas

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Trego County, Kansas 35 Twp. 11S Rge. 23W E/W
Location as "NE/CNW/SW" or footage from lines
S/2 SW SW

Lease Owner Associates Oil & Gas, Inc.
Lease Name RHOADES Well No. #1
Office Address Suite 501, 120 Bldg. Wichita, KS 67202
Character of Well (Completed as Oil, Gas or Dry Hole)

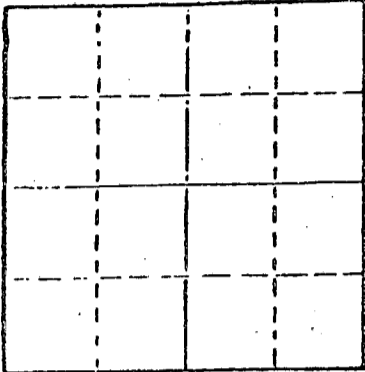

Locate well correctly on above
Section Plat

Dry Hole
Date Well completed December 6 1980
Application for plugging filed December 6 1980
Application for plugging approved December 6 1980
Plugging commenced December 6 1980
Plugging completed December 6 1980
Reason for abandonment of well or producing formation

No commercial quantity of oil or gas encountered
If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Balthazar
Producing formation Depth to top Bottom Total Depth of Well x
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

T.D. 3970'
Set 1st Plug @ 900' with 70 sx cement
Set 2nd Plug @ 260' with 25 sx cement
Set 3rd Plug solid bridge @ 40' to surface with 10 sx cement
5 sx. in rathole

Job was completed @ 12:30 p.m. on 12/05/80.
State Plugger - Gilbert Balthazar, Palco, Kansas.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Abercrombie Drilling, Inc.


STATE OF Kansas COUNTY OF Sedgwick, ss.
Jack L. Partridge, Asst. Sec./Treas. (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jack L. Partridge
801 Union Center, Wichita, KS 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 11th day of December, 1980

Jeanette A. Metheny
Jeanette A. Metheny Notary Public.

My commission expires 8-18-84



15-195-20727-00-00

CONTRACTOR'S WELL LOG

OPERATOR:
CONTRACTOR:
WELL NAME:
LOCATION:
SPUD DATE:
COMPLETION DATE:

Associates Oil & Gas, Inc.
Abercrombie Drilling, Inc.
RHOADES #1
S/2 SW SW, Section 35-11S-23W
Trego County, Kansas
11/29/80
12/06/80

STATE RECEIVED
DEC 15 1980
CONSERVATION DIVISION
Wichita, Kansas

0	1550	Sand & Shale
1550	3560	Shale
3560	3792	Shale & Lime
3792	3900	Lime
3900	3970	Shale & Lime
	3970	Rotary Total Depth

Spud hole @ 3:30 p.m., 11/28/80. Drilled @ 275' in an 11 1/4" hole. Ran 6 jts. of 8 5/8" - 24# casing (tally 265.12) Set @ 271.50. Cemented with 150 sx. of common 2% gel, 3% c.c. Cement did circulate. Plug was down at 11:00 p.m., 11/28/80. 7:00 a.m. 11/29/80 drilling the plug.

T.D. 3970'. 1st Plug @ 900' with 70 sx. of cement, 2nd plug @ 270' with 25 sx. cement; 3rd plug solid bridge @ 40' to surface with 10 sx. cement & 5 sx. in rathole. Job was completed @ 12:30 p.m. on 12/05/80. State Plugger - Gilbert Balthazar, Palco, Kansas.

SAMPLE TOPS:

Anhydrite 1740'
B/Anhydrite 1775'

STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)

Jack L. Partridge, Assistant Secretary/Treasurer of Abercrombie Drilling, Inc., does hereby state that the above and foregoing is a true and correct copy of the RHOADES #1, S/2 SW SW, Section 25-11S-23W, Trego County, Kansas.

ABERCROMBIE DRILLING, INC.

BY: Jack L. Partridge
Jack L. Partridge, Asst. Sec./Treas.

Subscribed and sworn to before me, A Notary Public, in and for the aforesaid county and state as of this 11th day of December, 1980.

Jeanette A. Metheny
Jeanette A. Metheny, Notary Public

