

Notice: Fill out COMPLETELY and return to Conservation Division at the address below within 60 days from plugging date.

KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION
WELL PLUGGING RECORD
K.A.R. 82-3-117

Form CP-4
December 2003
Type or Print on this Form
Form must be Signed
All blanks must be Filled

Lease Operator: TGT Petroleum Corp
Address: 7570 W 21st, Bldg 1010-D, Wichita, KS 67205
Phone: (316) 773-2266 Operator License #: 5118
Type of Well: Oil Docket #: _____
(Oil, Gas D&A, SWD, ENHR, Water Supply Well, Cathodic, Other) (If SWD or ENHR)
The plugging proposal was approved on: _____ (Date)
by: Jeff Klock (KCC District Agent's Name)
Is ACO-1 filed? Yes No If not, is well log attached? Yes No
Producing Formation(s): List All (if needed attach another sheet)

_____ Depth to Top: _____ Bottom: _____ T.D. _____

_____ Depth to Top: _____ Bottom: _____ T.D. _____

_____ Depth to Top: _____ Bottom: _____ T.D. _____

API Number: 15 - 155-20194-00-00
Lease Name: Miller "A"
Well Number: 5
Spot Location (QQQQ): _____ - NE - SE - NE
3650 Feet from North / South Section Line
330 Feet from East / West Section Line
Sec. 22 Twp. 23 S. R. 4 East West
County: Reno
Date Well Completed: 3-16-72
Plugging Commenced: 3-25-09
Plugging Completed: 3-31-09

Show depth and thickness of all water, oil and gas formations.

Oil, Gas or Water Records		Casing Record (Surface Conductor & Production)				
Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8	614	
				5 1/2	3664	1810

RECEIVED
APR 15 2009
CONSERVATION DIVISION
WICHITA, KS

Describe in detail the manner in which the well is plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same depth placed from (bottom), to (top) for each plug set.

Sand at 3080', bailed 5 sacks cement with bailer, welded 2" collar in 10 3/4" casing, set floor, pulled slips, cut casing head off, ripped casing at 2050', 1810', pipe came free, pulled casing out, started running casing back to 650', couldn't get past 400', pulled casing back out, ran tubing to 650', hooked up to 10 3/4", pumped 50 sacks, hooked up to 2 3/8" tubing, pumped 50 sacks, pulled to 450', waited 2 hours, tagged cement at 612', pumped 50 sacks at 450', pulled up to 210', tagged cement at 800', ran tubing down, couldn't get past 470', pumped 200# hulls, 100 sacks cement, pulled tubing out, waited 2 hours, tagged cement at 150', waited another 1.5 hrs, ran tubing to 150', circulated with 70 sacks, hooked up to 10 3/4", pumped 35 sacks, 200 psi.


Name of Plugging Contractor: Quality Well Service, Inc. License #: 31925
Address: 190 US Highway 56, Ellinwood, KS 67526

Name of Party Responsible for Plugging Fees: TGT Petroleum Corp.

State of Kansas County, Sedgwick, ss.

B. Lynn Herrington (Employee of Operator) or (Operator) on above-described well, being first duly sworn on oath, says: That I have knowledge of the facts statements, and matters herein contained, and the log of the above-described well is as filed, and the same are true and correct, so help me God.

(Signature) B. Lynn Herrington
(Address) B. Lynn Herrington, 7570 W. 21st, Bldg 1010-D, Wichita, KS 67205



SUBSCRIBED and SWORN TO before me this 10th day of April, 2009
Nancy K. Bell My Commission Expires: 1/14/2013
Notary Public


QUALITY OILWELL CEMENTING, INC.

Phone 785-483-2025
Cell 785-324-1041

Home Office P.O. Box 32 Russell, KS 67665

No. 2340

Date	3-26-09	Sec.	22	Twp.	23	Range	4	Called Out		On Location		Job Start		Finish	6:30										
Lease	MILLER	Well No.	A #5			Location			Buchon, Ks	County	Renov	State													
Contractor	Quality Well Services					Owner					A W I N W INTO														
Type Job	PTA					To Quality Oilwell Cementing, Inc. You are hereby requested to rent cementing equipment and furnish cementer and helper to assist owner or contractor to do work as listed.																			
Hole Size						T.D.																			
Csg.	8 5/8					Depth					Charge To					TGT Petroleum Corp									
Tbg. Size	2 3/8					Depth					672					Street									
Drill Pipe						Depth										City					State				
Tool						Depth					The above was done to satisfaction and supervision of owner agent or contractor.														
Cement Left in Csg.						Shoe Joint																			
Press Max.						Minimum																			
Meas Line						Displace																			
Perf.																CEMENT USED 150 sacks									
EQUIPMENT										Amount Ordered					200 sacks Common										
Pumptrk	5	No.	Cementer		Helper		TODD		Consisting of																
Bulktrk	8	No.	Driver		Driver		BOBBY		Common					150 @ 10 ⁰⁰											
Bulktrk		No.	Driver		Driver				Poz. Mix																
JOB SERVICES & REMARKS										Gel.															
Pumptrk Charge	PTA					600 ⁰⁰					Chloride					4 @ 42 ⁰⁰									
Mileage	70 @ 6 ⁰⁰										Hulls														
Footage											Salt														
Total										Flowseal															
Remarks:										Sales Tax															
10 3/4 x 2 7/8 DOWN BACKSIDE										Handling					154										
Pump 50 sacks Common										Mileage					JOB PER @ RSN M. LS					500 ⁰⁰					
Hookup to tbg @ 672										Sub Total															
Pump 50 sacks Common 3% CL										Total															
WOC tag										Floating Equipment & Plugs															
tbg @ 472										Squeeze Manifold															
MAX Pump 50 sacks Common 3% CL										Rotating Head															
Released										Used 150 sacks total															
Thank																									
TODD																									
BOBBY																									
PLEASE CALL AGAIN																									
Signature										20% Discount															
										Total Charge															

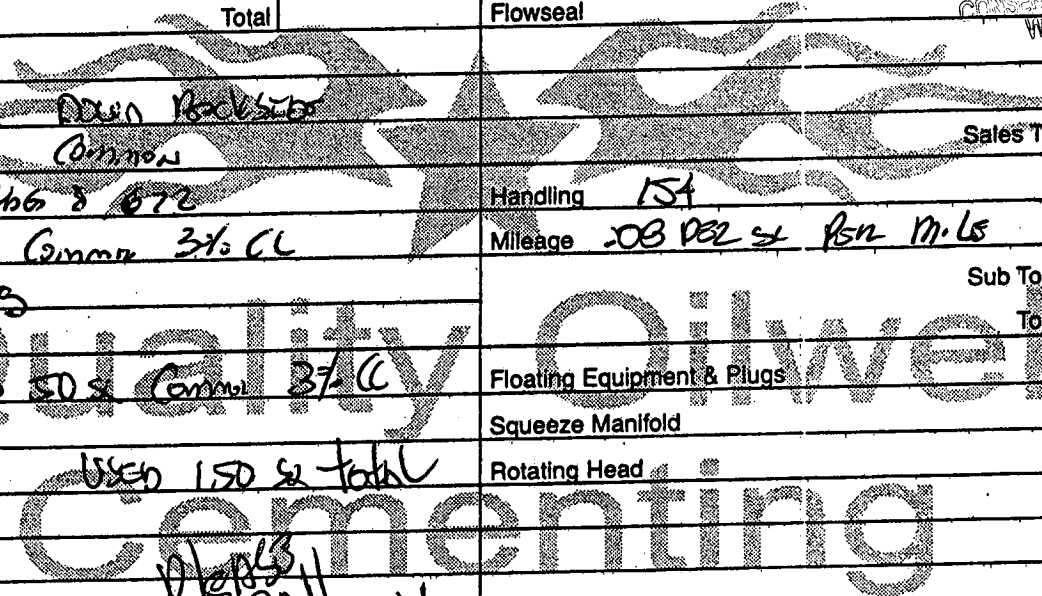

RECEIVED
KANSAS COMMISSION
APR 15 2009
CONSERVATION DIVISION
WICHITA, KS


QUALITY OILWELL CEMENTING, INC.

Phone 785-483-2025
Cell 785-324-1041

Home Office P.O. Box 32 Russell, KS 67665

No. 2342

Date	3.31.09	Sec.	22	Twp.	23	Range	4	Called Out		On Location		Job Start		Finish	2:30 PM	
Lease	Miller	Well No.	A 25			Location			Buxton Ks	Prep	County		State	KS		
Contractor	Quality Well Services				Owner	4W I N W into				To Quality Oilwell Cementing, Inc. You are hereby requested to rent cementing equipment and furnish cementer and helper to assist owner or contractor to do work as listed.						
Type Job	PTA				Hole Size	T.D.				Charge To	TGT Pet. Coop					
Csg.					Tbg. Size	2 3/8				Depth	490					
Drill Pipe					Tool					Street						
Cement Left in Csg.					Press Max.					City	State					
Meas Line					Perf.					The above was done to satisfaction and supervision of owner agent or contractor.						
EQUIPMENT										Amount Ordered	USED 175 ^{CEMENT} 200 ^{SK} Common					
Pumptrk	5	No.	Cementer Helper		JOE		Consisting of									
Bulktrk	8	No.	Driver		Bobby		Common		175							
Bulktrk	PV	No.	Driver		TODD		Poz. Mix		RECEIVED KANSAS STATE COMMISSION APR 15 2009							
JOB SERVICES & REMARKS										Chloride	2					
Pumptrk Charge	PTA				Hulls						CONSERVATION COMMISSION WICHITA KS					
Mileage	70				Salt											
Footage					Flowseal											
Remarks:										Sales Tax						
638' tag / 440'																
Max Pump 100" hulls																
Max Pump 100" 3 3/8 WOC / 100" hulls										Handling 175						
Resp / Spurt down WOC 2 hrs										Mileage .0003 ^{SK} PSL MHC						
tag out 150 WOC 1 1/2										Sub Total						
tag out 150										Total						
Max Pump 70 ^{SK} Common										Floating Equipment & Plugs						
cowl out to surface										Squeeze Manifold						
Hook up to 3 3/8 WOC 10 3/4										Rotating Head						
Max Pump 3 ^{SK} Common																
200" JOB complete																
Thank																
TODD JOE										Tax						
Bobby										Discount						
Signature TODD A SESA										Total Charge						

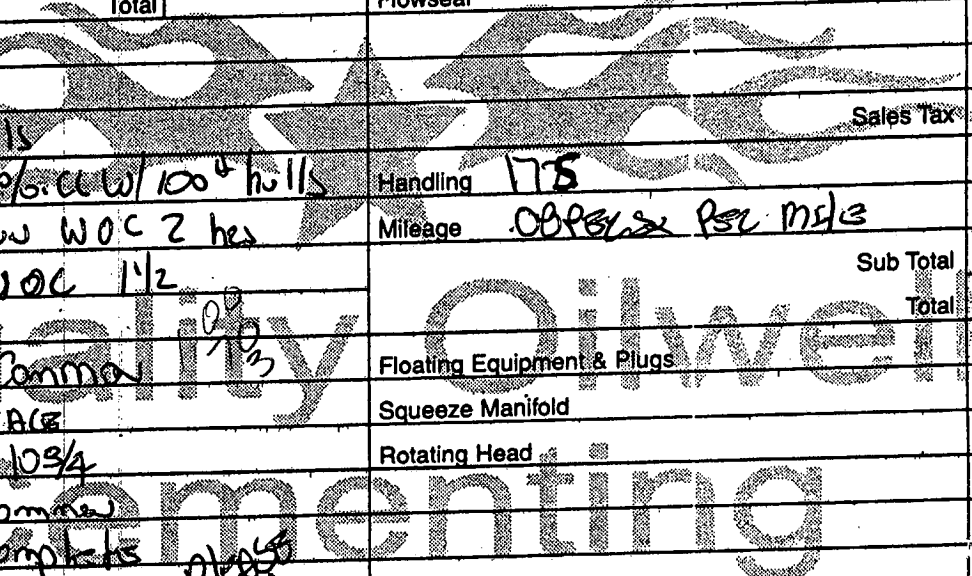

PLEASE
CALL
785-324-1041