

Notice: Fill out COMPLETELY and return to Conservation Division at the address below within 60 days from plugging date.

KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION
WELL PLUGGING RECORD
K.A.R. 82-3-117

Form CP-4
December 2003
Type or Print on this Form
Form must be Signed
All blanks must be Filled

Lease Operator: TGT Petroleum Corp

Address: 7570 W 21st, Bldg 1010-D, Wichita, KS 67205

Phone: (316) 773-2266 Operator License #: 5118

Type of Well: Oil Docket #: _____
(Oil, Gas D&A, SWD, ENHR, Water Supply Well, Cathodic, Other) (If SWD or ENHR)

The plugging proposal was approved on: _____ (Date)

by: Jeff Klock (KCC District Agent's Name)

Is ACO-1 filed? Yes No If not, is well log attached? Yes No

Producing Formation(s): List All (If needed attach another sheet)

_____ Depth to Top: _____ Bottom: _____ T.D. _____

_____ Depth to Top: _____ Bottom: _____ T.D. _____

_____ Depth to Top: _____ Bottom: _____ T.D. _____

API Number: 15-155-20063-00-00

Lease Name: Hill

Well Number: 4

Spot Location (QQQQ): C - N/2 - SW - SW

990 Feet from North / South Section Line

520 Feet from East / West Section Line

Sec. 27 Twp. 38 S. R. 4 East West

County: Reno

Date Well Completed: 8-3-68

Plugging Commenced: 3-31-09

Plugging Completed: 4-3-09

Show depth and thickness of all water, oil and gas formations.

Oil, Gas or Water Records		Casing Record (Surface Conductor & Production)				
Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8	664	
				4 1/2	3427	1510

Describe in detail the manner in which the well is plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same depth placed from (bottom), to (top) for each plug set.

Sand at 3270', bailed 4 sacks cement with bailer, dug cellar, cut 4 1/2" casing loose from 8 5/8", set floor, ripped casing at 1510', pulled casing out, ran tubing down to 736', pumped 50 sacks cement, pulled tubing up to 350', tagged cement at 615', pulled tubing up to 280', pumped 100# hulls, 150 sacks, 100# hulls, pulled tubing out, waited 2 hours, tagged cement at 420', ran tubing to 310', pumped 125 sacks, pulled tubing out, waited 2 hours, tagged cement at 250', ran tubing to 240', circulated with 150 sacks to surface, pulled tubing out.

Name of Plugging Contractor: Quality Well Service, Inc. License #: 31925

Address: 190 US Highway 56, Ellinwood, KS 67526

Name of Party Responsible for Plugging Fees: TGT Petroleum Corp.

State of Kansas County, Sedgwick, ss.

B. Lynn Herrington (Employee of Operator) or (Operator) on above-described well, being first duly

sworn on oath, says: That I have knowledge of the facts statements, and matters herein contained, and the log of the above-described well is as filed, and the same are true and correct, so help me God.

NANCY K. BELL
Notary Public - State of Kansas
My Appt. Expires 1/14/2013

(Signature) B. Lynn Herrington

(Address) B. Lynn Herrington
7570 W. 21st, Bldg 1010-D, Wichita, KS 67205

SUBSCRIBED and SWORN TO before me this 10th day of April, 20 09

Nancy K. Bell My Commission Expires: 1/14/2013
Notary Public

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202

RECEIVED
KANSAS CORPORATION COMMISSION
APR 15 2009
CONSERVATION DIVISION
WICHITA, KS

RKT


QUALITY OILWELL CEMENTING, INC.

Phone 785-483-2025
Cell 785-324-1041

Home Office P.O. Box 32 Russell, KS 67665

No. 2343

Date	4-1-09	Sec.	27	Twp.	23	Range	4	Called Out		On Location		Job Start		Finish	4:00 P.M.
Lease	HILL	Well No.	4	Location	Buzerton Ki			County	Reno	State	KS				
Contractor	Quality WELL SERVICES				Owner	SW 3/4 S E 1/4									
Type Job	PTA				To Quality Oilwell Cementing, Inc. You are hereby requested to rent cementing equipment and furnish cementer and helper to assist owner or contractor to do work as listed.										
Hole Size					T.D.										
Csg.	8 5/8				Depth	Charge To JBT									
Tbg. Size	2 3/8				Depth	736									
Drill Pipe					Depth										
Tool					Depth										
Cement Left in Csg.					Shoe Joint										
Press Max.					Minimum										
Meas Line					Displace										
Perf.						CEMENT									
EQUIPMENT					Amount Ordered	200									
Pumptrk	5	No.	Cementer	Bobby	Consisting of										
Bulktrk	B	No.	Driver	JOE	Common 50 2 500										
Bulktrk	P	No.	Driver	TONY	Poz. Mix										
JOB SERVICES & REMARKS					Gel.	DEARLAND									
Pumptrk Charge	PTA 1st Day 600				Chloride	1 SASL CONCRETE COMMISSION									
Mileage	66 2 6				Hulls	APR 15 2009									
Footage					Salt	CONSERVATION DIVISION WICHITA, KS									
Total					Flowseal										
Remarks:	Hgs d 736														
Max Pump 50 x Common 3 1/2 CC					Handling	51									
DISP					Mileage	08 PER x PER M.LS ON ticket # 2344									
SAVT down FOR DAY					Sub Total										
					Total										
					Floating Equipment & Plugs										
					Squeeze Manifold										
					Rotating Head										
Thank															
TDOO															
JOE															
Bobby															
Signature TDOO & SOBA															
					Tax										
					Discount										
					Total Charge										

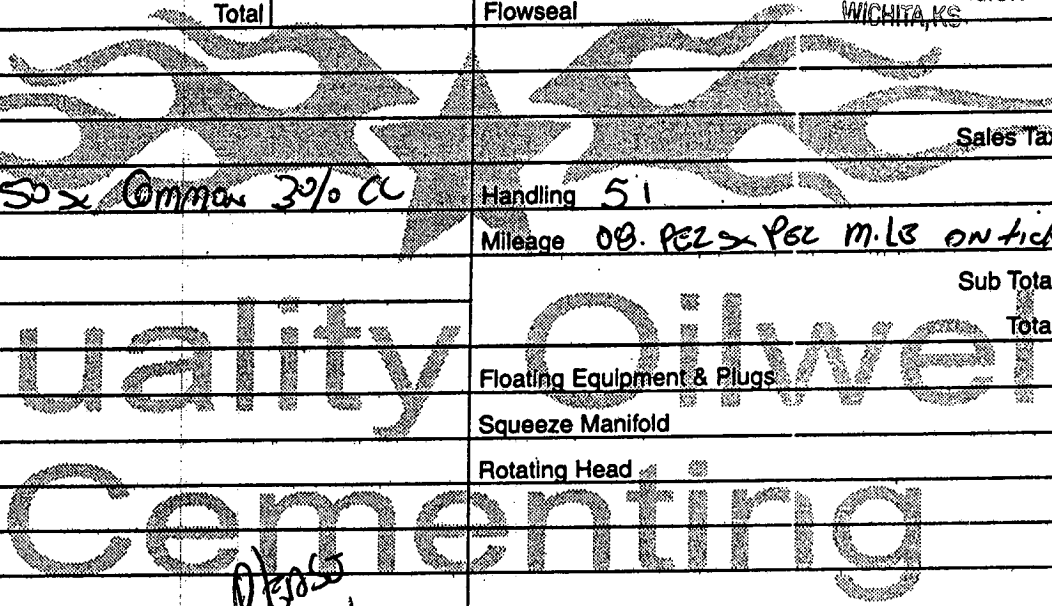

PLEASE CALL AGAIN

QUALITY OILWELL CEMENTING, INC.

Phone 785-483-2025
Cell 785-324-1041

Home Office P.O. Box 32 Russell, KS 67665

No. 2344

Date	4-2-09	Sec.	27	Twp.	23	Range	4	Called Out		On Location		Job Start		Finish	4:20 P.M.	
Lease	HILL	Well No.	4				Location	Burlington Ks		County	Renno	State	Ks			
Contractor	Quality Well Services						Owner	SW 3/4 S E 20								
Type Job	PTA						To Quality Oilwell Cementing, Inc. You are hereby requested to rent cementing equipment and furnish cementer and helper to assist owner or contractor to do work as listed.									
Hole Size							T.D.									
Csg.	8 5/8						Depth	Charge To TGT								
Tbg. Size	2 3/8						Depth	Street								
Drill Pipe							Depth	City				State				
Tool							Depth	The above was done to satisfaction and supervision of owner agent or contractor.								
Cement Left in Csg.							Shoe Joint									
Press Max.							Minimum									
Meas Line							Displace									
Perf.							Amount Ordered	USED 150 Sx Common		CEMENT 275 Sx 60/40 P&L 4% GEL						
EQUIPMENT																
Pumptrk	5	No.	Cementer	JOB			Consisting of									
Bulktrk	8	No.	Driver	Bobbi			Common 315									
Bulktrk	PJ	No.	Driver	TODD			Poz. Mix 10									
JOB SERVICES & REMARKS							Gel. 10									
Pumptrk Charge	PTA 2nd Day			400.00			Chloride 8									
Mileage	66 on loc			N/C			Hulls 200'									
Footage							Salt									
Total							Flowseal									
Remarks:							Sales Tax									
TAG CNT 615'							Handling 494 to 125									
Hgs @ 200'							Mileage .08 PER Sx P&L Mile									
100' hulls							Sub Total									
150 Sx Common 1st 100 30% CLW							Total									
100 hulls							Floating Equipment & Plugs									
WOC 2 hrs tag @ 420'							Squeeze Manifold									
WOC 1.20 hrs @ 150'							Rotating Head									
MEX Pump 125x 60/40 P&L 4% GEL 3% CLW																
WOC hrs @ 22A																
3.00 MEX Pump 150 Sx 60/40 P&L																
4% GEL 3% CLW																
C&C C&I TO SURFACE																
Thanks																
TODD JOB																
Signature TODD A SESA							Tax									
							Discount									
							Total Charge									

RECEIVED
KANSAS COMMISSION
APR 15 2009
CONSENT DIVISION
WICHITA, KS

PLEASE
CALL
WELL

100' tag
200' tag