


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Trego County, Sec. 30 Twp. 11 Rge. 24 E/W
Location as "NE/4NW/4SW/4" or footage from lines SW SE SE

Lease Owner Associates Oil & Gas, Inc.
Lease Name Owens Well No. 1
Office Address 501 One Twenty Building, Wichita 67202
Character of Well (Completed as Oil, Gas or Dry Hole)

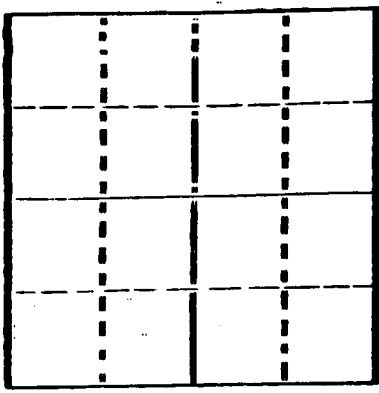

Locate well correctly on above Section Plot

Dry Hole
Date Well completed 5/13/76 19
Application for plugging filed 5/13/76 19
Application for plugging approved 5/13/76 19
Plugging commenced 5/13/76 19
Plugging completed 5/13/76 19
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Balthazor
Producing formation Depth to top Bottom Total Depth of Well 4125
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CEMENT	FEET	TO	SIZE	JOINTS	TESTED
Surface	8-5/8	0	208'	8-5/8	yes	no

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Bottom plug at 1000# 70 sx
Middle plug 200' with 20 sacks
Top bridge 40' 10 sks.
Job complete 7 p.m. 5/13/76

RECEIVED
STATE CORPORATION COMMISSION
5-28-1976
MAY 20 1976
CONSERVATION DIVISION
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor Slawson Drilling Company, Inc.

STATE OF Kansas COUNTY OF Sedgwick
James C. Remsberg (employee of owner) or (owner or operator) of the above-described well being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James C. Remsberg
James C. Remsberg
May 22, 1976

Subscribed and Sworn to before me this 22nd day of May, 1976

My commission expires January 17, 1976
Mary Lou Taylor Notary Public



15-195-20369-00-00

DRILLERS LOG

COMPANY: Associates Oil & Gas, Inc.
 501 One Twenty Building
 Wichita, Kansas 67202

LEASE NAME: Owens No.1
 SW SE SE 30-11S-24W
 Trego County, Kansas

CONTRACTOR: Slawson Drilling Company, Inc.
 408 One Twenty Building
 Wichita, Kansas 67202

Total Depth: 4125'

COMMENCED: 5/6/76

COMPLETED: 5/13/76

SURFACE: 201.14' used 8-5/8" set at 208' with 175 sx

RECEIVED
 5-28-1976
 MAY 28 1976
 WICHITA, KANSAS

0' to 215' Surface hole
 215' to 650' Shale
 650' to 1635' Shale & shells with sand streaks
 1635' to 1848' sand
 1848' to 1980' Shale & shells with sand streaks
 1980' to 2160' shale and shells
 2099' to 2146' top of anhydrite
 2160' to 2453' shale and shells
 2453' to 2740' shale
 2740' to 2888' shale & shells
 2888' to 3888' Shale & lime
 3888' to 3965' Lime
 3965' to 4056' Kansas City Limestone
 4056' to 4125' Lime
 4125' RTD

STATE OF KANSAS

COUNTY OF SEDGWICK

I, James C. Remsberg, of the Slawson Drilling Company, Inc. upon oath state that the above and foregoing is a true and correct copy of the log of the Owens No.1 well.

James C. Remsberg
 James C. Remsberg

Subscribed and sworn to me on May 22, 1976

Mary Lou Taylor
 Mary Lou Taylor, Notary

My commission expires January 17, 1977

