


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

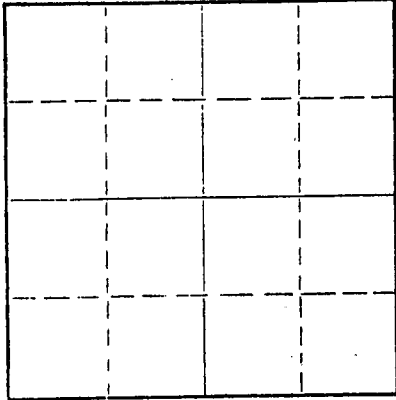

Locate well correctly on above
Section Plat

Sheridan County, Sec. 12 Twp. 9 Rge. 28 (E) W (W)
Location as "NE/CNW/SW" or footage from lines NW SW SW
Lease Owner Dreiling Oil, Inc.
Lease Name Lindeman Well No. 3
Office Address Rt. #2, Victoria, Kansas 67671
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed 8-27 19 68
Application for plugging filed 2-4 19 73
Application for plugging approved 2-6 19 73
Plugging commenced 3-15 19 73
Plugging completed 3-15 19 73
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 1-11 19 73
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Bill Nichols
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4145 Feet
4153
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

^{KLC}_{RT} CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface Pipe				8 5/8"	253'	
Casing				4 1/2"	4144'	1530'
					4152	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Ran 1525 jts. 2" tubing, circulated gel, 30 sacks cement. Pulled tubing to 1475, displaced 110 cu. ft. cement. Pulled tubing to 275, displaced 30 cu. ft. cement, pulled tubing to 30' circulated 10 cu. ft. cement. Job completed 4:00 P.M. 3-15-73.

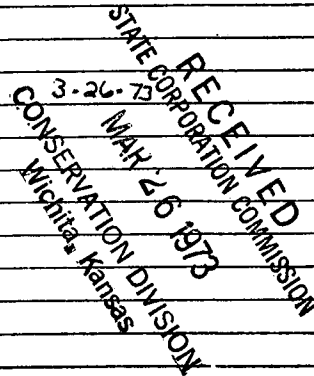


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Allied Cementing Co., Inc.
Address Russell, Ks. 67665

STATE OF KANSAS, COUNTY OF ELLIS, ss.
I, Joe Hess, Sec. Treas. of Drlg. Contrc. (Employed as Contractor) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Joe Hess
JOE HESS, Rt. #2, Victoria, Ks. 67671
(Address)

SUBSCRIBED AND SWORN TO before me this 23rd day of March, 19 73



Cecilia Basgall
CECILIA BASGALL Notary Public.

My Commission expires September 13, 1976

L. J. DREILING AND SONS, INC.

Victoria, Kansas, 67671

WELL LOG

Company	Leo J. Dreiling Oil Company Route 2 Victoria, Kansas 67671	Sec. 12	Twp. 9	Rng. 28
Farm	Lindeman No. 3	Location	NW SW SW	
Total Depth	4153'	County	Sheridan	
Comm.	8-19-68 Comp. 8-27-68	Elevation:	2768'	K. B.
Contractor	L. J. Dreiling & Sons, Inc. Route 2 Victoria, Kansas 67671		2765'	D. F.
			2763'	G. R.
		Casing Record	Cement Record	Production:
	253' - 8 5/8"		175 sacks cement	
	4152' - 4 1/2"		200 sacks cement	

Figures Indicate Bottom of Formations


0'	40'	Top Soil & Sand
40'	141'	Surface Clay & Sand
141'	190'	Clay & Sand
190'	229'	Sand
229'	253'	Blue Shale
253'	680'	Shale
680'	1243'	Shale & Sand
1243'	2379'	Shale & Sand
2379'	2414'	Anhy.
2414'	2557'	Shale & Shells
2557'	3470'	Lime & Shale
3470'	3755'	Lime, Chalk & Shale
3755'	3855'	Lime & Sand
3855'	4153'	Lime
4153'	T.D.	

STATE OF KANSAS)
)ss
 COUNTY OF ELLIS)

I, Leo F. Dreiling, of the L. J. Dreiling & Sons, Inc., upon oath states that the above and foregoing is a true and correct copy from the Daily Drilling Report from your Lindeman #3.

Leo F. Dreiling
 LEO F. DREILING

Subscribed and sworn to before me this 3rd. day of September 1968.



Joseph A. Hess
 JOSEPH A. HESS NOTARY PUBLIC

My commission expires: September 19, 1970

RECEIVED
 STATE CORPORATION COMMISSION
 FEB 6 1973
 CONSERVATION DIVISION
 Wichita, Kansas