

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Rooks County. Sec. 15 Twp. 10S Rge. 16 XX (W)
Location as "NE/CNW/SW" or footage from lines C NE NW SE

Lease Owner Cities Service Petroleum Company
Lease Name Smith U Well No. 5

Office Address Box 553 Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed July 9, 1962 19

Application for plugging filed July 9, 1962 19

Application for plugging approved July 9, 1962 19


Plugging commenced July 9, 1962 19

Plugging completed _____ 19

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production _____ 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

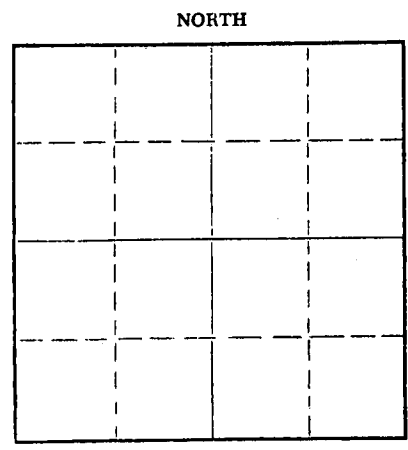

Name of Conservation Agent who supervised plugging of this well _____
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3600' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	240'	8 5/8"	240'	0

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy mud, pushed Howco wooden plug to 550' w/drill pipe, spotted 20 sacks cement through drill pipe on plug at 550', filled hole with heavy mud to 220' through drill pipe, pushed Howco wooden plug w/drill pipe to 220', filled hole with heavy mud to 40', pushed Howco wooden plug to 40' and 1/4 sacks hulls, filled hole from 40' to base of cellar w/10 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION
8-21-62
AUG 21 1962
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Peel Brothers Incorporated
Address Box 359 Hoisington, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
M. M. Hardin (employee of owner) or (owner/operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) M. M. Hardin

Box 553 Russell, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 13th day of July, 1962
N. D. Smith Notary Public.

My commission expires March 12, 1963



WELL RECORD

Company Cities Service Petroleum Co. Well No. 5 Farm Smith 02U02
 Location 2310' North and 990' East of S¹/₄ Corner Sec. 15 T. 10 R. 16W
 Elevation 2086 KB, 2084 DF, 2079 Gr. County _____ Rocks _____ State Kansas
 Initial Prod. Dry hole. P. and A. 7-9-62 Contractor Poel Bros., Inc.
 Acid None Drlg. Comm. June 25, 1962
 T. D. 3600' Drlg. Comp. July 8, 1962

CASING RECORD:

8-5/8" at 238' with 200 sacks cement.

FORMATION RECORD:

lime	0-100
shale and shells	460
sand	650
shale and shells	700
sand	900
shale and red bed	1260
Anhydrite	1297
shale and shells	1545
lime	1600
shale	1810
lime	1835
shale and lime	2105
lime and shale	2210
lime	2460
lime and shale	2585
shale and lime	2685
shale	2730
shale and lime	2810
lime	2889
shale and lime	2970
lime	3580
Conglomerate	3600 T.D.

SLOPE TESTS (SYFO):
 500' - 1°
 1000' - 1°
 1500' - 1°
 2000' - 3/4°
 2500' - 1°
 3085' - 1°
 3450' - 1°

RECEIVED
 STATE CORPORATION COMMISSION
 AUG 21 1962
 CONSERVATION DIVISION
 Wichita, Kansas