

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

County Sec. 16 Twp. 10 Rge. 16 (E) W (W)

Location as "NE/CNW/SW" or footage from lines Raymond Oil Co., Inc.

Lease Owner _____
Lease Name Post-Conger Well No. 2

Office Address 410 4th Nat'l Bank Bldg.

Character of Well (completed as Oil, Gas or Dry Hole) Oil Well

Date well completed August 20, 1965 19__

Application for plugging filed January 16, 1967 19__

Application for plugging approved January 17 19__ 67

Plugging commenced February 20 19__ 67

Plugging completed February 22 19__ 67

Reason for abandonment of well or producing formation No longer commercially productive


If a producing well is abandoned, date of last production January 14 19__ 67

Was permission obtained from the Conservation Division or its agents before plugging was commenced? _____

Name of Conservation Agent who supervised plugging of this well Leo Massey

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____ Feet

Show depth and thickness of all water, oil and gas formations.

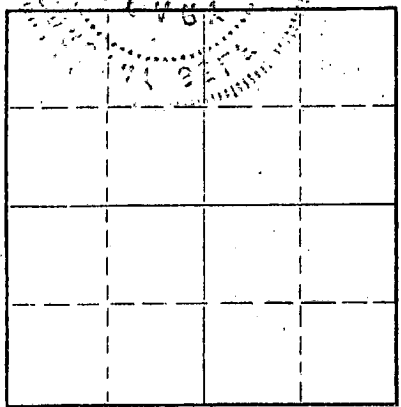

Locate well correctly on above Section Plat


OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|-----------|---------|------|----|--------|--------|------------|
| | | | | 8 5/8" | 246' | |
| | | | | 5 1/2" | 3481' | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled back to 3470' with rock. Dumped 5 sacks of cement. Shot pipe off at 2631.30'. Pulled pipe and squeezed 25 sacks of Jel-Mud and 85 sacks of cement with Allied Cementing Co.

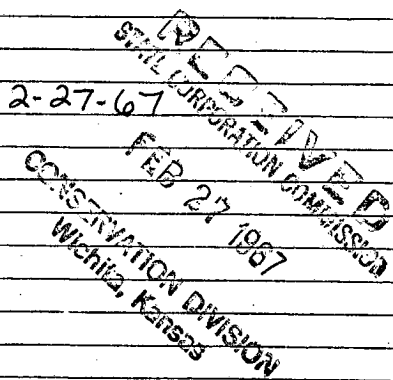

Name of Plugging Contractor Bert Self (if additional description is necessary, use BACK of this sheet)
Address Hutchinson, Kans.

STATE OF Kans. COUNTY OF Reno, ss. _____ (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Bert Self
R. R. #4, Hutchinson, Kans. (Address)

SUBSCRIBED AND SWORN to before me this 23rd day of February 1967
October 18, 1969
My commission expires _____
Notary Public.



15-163-30122-0000

RAYMOND OIL COMPANY, INC.
POST-CONGER #2
Approx. SE NE Sec. 16-10S-16W
Rooks County, Kansas

Drilling Contractor: Company Tools
Commenced: August 4, 1965
Completed: August 13, 1965

Casing Record:
246' 8 5/8" w/200 sx.
3481' 5 1/2" w/100 sx.

Figures Indicate Bottom of Formation

| | |
|--------------------------|------|
| Post Rock & Shale | 42 |
| Shale | 720 |
| Sand & Pyrite | 775 |
| Shale & Red Bed | 1175 |
| Red Bed | 1221 |
| Anhydrite | 1259 |
| Shale & Shells & Red Bed | 1700 |
| Shale with Lime | 1925 |
| Lime & Shale | 2130 |
| Lime with Shale | 2285 |
| Lime & Shale | 2325 |
| Shale | 2440 |
| Lime & Shale | 2615 |
| Shale & Lime | 2794 |
| Lime & Shale | 2975 |
| Lime | 3445 |
| Lime & Shale | 3474 |
| Lime | 3600 |
| RTD | 3600 |

RECEIVED
STATE CORPORATION COMMISSION
JAN 17 1967
CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS)
) SS:
COUNTY OF SEDGWICK)

I hereby certify that the above is true and correct to the best of my knowledge.

Wm. M. Raymond
Wm. M. Raymond

Subscribed and sworn to before me, this 18th day of August, 1965.

Ronnie Donnelly
Ronnie Donnelly - Notary Public

My commission expires:

February 15, 1967

