

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
1 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

Rooks County, Sec. 18 Twp. 10 Rge. 17 (E) (W)

Location as "NE/CNW/SW" or footage from lines C NW NW

Lease Owner Woodman & Iannitti Drilling Co.

Lease Name Garvert Well No. 1

Office Address 714 Union Nat'l. Bldg., Wichita

Character of Well (completed as Oil, Gas or Dry Hole) dry hole

Date well completed April 7 1962

Application for plugging filed " 7 19 62

Application for plugging approved " 7 19 62


Plugging commenced XXXXXX 4-7 19 62

Plugging completed April 7 19 62

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

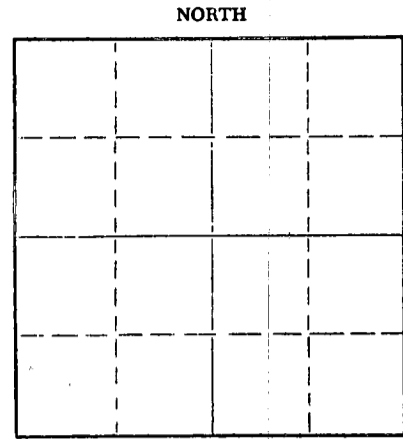

Locate well correctly on above Section Flat

Name of Conservation Agent who supervised plugging of this well Eldon Petty

Producing formation Depth to top Bottom Total Depth of Well 3751 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	181'	

REC'D  
STATE CORP. COM.  
4-10-62  
APR 10 1962  
CONSERVATION DIVISION  
WICHITA, KANSAS

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Bottom plug @ 550' w/20 sx cement  
middle plug @ 180' W/20 sx cement  
Top plug @ 35' W/10 sx cement

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Woodman & Iannitti Drilling Co.

Address 714 Union Nat'l. Bldg., Wichita

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
K. T. Woodman (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. K. T. Woodman

(Signature)

714 Union Nat'l. Bldg.

(Address)

SUBSCRIBED AND SWORN to before me this 10th day of April, 1962

Frances H. Solomon

Frances H. Solomon Notary Public.

My commission expires Oct. 10, 1963



DRILLING LOG

Company: Woodman & Iannitti Drilling Company  
 Lease: #1 Carvert C NW NW 18-10-17W, Rooks County, Kansas  
 Contractor: Woodman & Iannitti Drilling Company  
 Date Commenced: March 30, 1962  
 Date Completed: April 7, 1962  
 Total Depth: 3751'  
 Casing 8 5/8" at 181' with 130 sacks cement

RECEIVED  
 STATE CORPORATION COMMISSION  
 APR 10 1962  
 CONSERVATION DIVISION  
 Wichita, Kansas

Figures Indicate the Bottom of Formation

0 - 25	Clay	1485	Anhydrite
45	Sand	1785	Shale
155	Post Rock & Streak of Sand	2145	Shale, Shells & Lime
181	Blue Shale	2840	Lime
620	Shale	3135	Lime & Shale
675	Shale & Sand	3640	Lime
950	Shale	3692	Conglomerate
1140	Sand	3736	Simpson Shale & Dolo.
1451	Red Bed	3751	Arbuckle Dolomite

I certify the above to be a true and correct copy of the Driller's Log to the best of my knowledge and belief.

WOODMAN & IANNITTI DRILLING COMPANY

By: \_\_\_\_\_

*K. T. Woodman*

K. T. Woodman