

15-063-01006-00-00

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

Gove County, Sec. 22 Twp. 11 Rge. 30 (E) (W)

Location as "NE/CNW/SW" or footage from lines C SE SE

Lease Owner Fred B. Anschutz

Lease Name Campbell Well No. 1

Office Address Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 11-26 19 63

Application for plugging filed 11-26 19 63

Application for plugging approved 11-26 19 63


Plugging commenced 11-26 19 63

Plugging completed 11-26 19 63

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

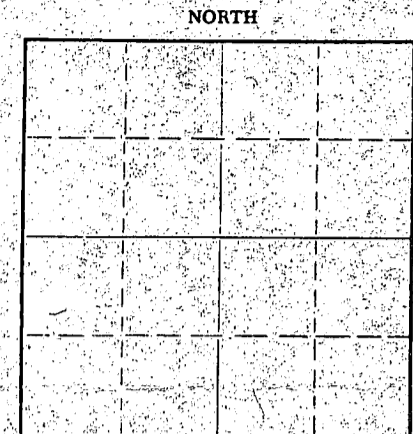

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty

Producing formation Depth to top Bottom Total Depth of Well 4608 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Intermediate String		0	163'	8 5/8	163'	0
Surface Casing		0	300'	8	300'	0

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with mud to 550', 1/2 sk. hulls, 20 sks. cement. Mud to 250', 1/2 sk. hulls, 40 sks. cement. Mud to 40' 1/4 sk. hulls, 10 sks. cement.

RECEIVED  
STATE CORPORATION COMMISSION  
12-3-1963  
DEC 3 1963

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Terrel Drilling and Producing  
Address Box 606, Russell, Kansas


STATE OF Kansas COUNTY OF Russell, ss.

Subscribed and sworn to before me this 12-3-1963 by Joe K. Branum (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Joe K. Branum  
Russell, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 2nd day of December, 19 63

My commission expires 12-12-66 Notary Public.



15-063-01006-00-00

WELL LOG

OPERATOR: Fred B. Anschutz  
1521 Plaza Bldg.  
Wichita, Kansas

CONTRACTOR: Terrel Drilling & Producing  
Box 606  
Russell, Kansas

LEASE: Campbell #1

COMMENCED: October 27, 1963

LOCATION: C SE SE Sec.22-11S-30W  
Gove County, Kansas

COMPLETED: November 26, 1963

RECEIVED  
STATE CORPORATION COMMISSION  
12-3-1963  
DEC 3 1963

CONSERVATION DIVISION  
Wichita, Kansas

DEPTHS & FORMATIONS

Surface Clay & Sand	161	Lime & Shale	3252
Shale	240	Lime, Shale, w/Streaks Chalk	3285
Shale & Shells	1224	Chalky Lime & Shale	3310
Shale	1290	Lime	3455
Shale & Shells	1590	Lime & Shale	3917
Sand & Shale	1680	Lime	3953
Shale & Shells	1960	Lime & Shale	4154
Anhydrite	1995	Lime	4185
Shale & Shells	2160	Lime & Shale	4236
Shale, Shells & Red Bed	2260	Lime	4330
Shale w/Lime Streaks	2350	Lime & Shale	4435
Lime	2366	Lime (R.T.D.)	4608

STATE OF KANSAS )

COUNTY OF RUSSELL )

ss...

Joe K. Branum, owner of Terrel Drilling and Producing, being first duly sworn on oath says: "That I have knowledge of the facts, statements, and matters herein contained and the log of the above described well as filed and that the same are true and correct."

Joe K. Branum  
Joe K. Branum - TERREL DRILLING & PRODUCING

Subscribed and sworn before me this 29th day of November, 1963.

L. Lee Simpson  
L. Lee Simpson - Notary Public

My Commission Expires December 12, 1966.