


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH



Locate well correctly on above
Section Plat

Logans County, Sec. 5 Twp. 11 Rge. 32W (E) (W)
Location as "NE/CNWxSWx" or footage from lines Approx SE SE SW
Lease Owner Donald C. Slawson
Lease Name Heyen 'D' Well No. 1
Office Address 200 Douglas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed July 26, 1978
Application for plugging filed July 26, 1978
Application for plugging approved July 26, 1978
Plugging commenced July 26, 1978
Plugging completed July 26, 1978
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Gilbert Balthazor
Producing formation Depth to top Bottom Total Depth of Well 4680' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	318.91	surface	327'	8 5/8"		

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

1st plug @ 1400' w/70 sx
2nd plug @ 300' w/ 20 sx
Bridge @ 40' w/10 sx
2 sx in rat hole

RECEIVED
STATE CORPORATION COMMISSION
10-4-1978
OCT 4 1978

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Slawson Drilling Co., Inc.
Address 200 Douglas Building Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
R. J. THATCHER (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. J. Thatcher
R. J. THATCHER 200 Douglas Building, Wichita, KS

SUBSCRIBED AND SWORN TO before me this 28th day of September 1978
Sherry L. Milford
SHERRY MILFORD Notary Public.

My commission expires 6/12/82



OPERATOR: Donald C. Slawson
 200 Douglas Building
 Wichita, Kansas 67202

LEASE: #1 Heyen 'D'
 Approx SE SE SW Sec. 5-11-32W
 Logan County, Kansas

CONTRACTOR: Slawson Drilling Co.
 200 Douglas Building
 Wichita, Kansas 67202

COMMENCED: July 15, 1978

COMPLETED: July 26, 1978

CASING: Surface - 8 5/8" @ 327' w/250 sx 60/40 poz.

0 - 331	Surface Hole
331 - 1166	Shale and Shells
1166 - 1864	Shale and Shells
1864 - 2251	Shale, Shells and Sand
2251 - 2599	Shale
2599 - 2621	Anhydrite
2621 - 2627	Anhydrite
2627 - 3232	Shale
3232 - 3883	Lime and Shale
3883 - 4260	Lime
4260 - 4273	Lime
4273 - 4287	Lime and Shale
4287 - 4400	Lime
4400 - 4627	Shale and Lime
4627 - 4665	Lime
4665 - 4680	Lime
4680	RTD

RECEIVED
 STATE CORPORATION COMMISSION
 10-4-1978
 OCT - 4 1978

CONSERVATION DIVISION
 Wichita, Kansas


STATE OF KANSAS)
)
 COUNTY OF SEDGWICK) SS.

I, R. J. THATCHER, of the Slawson Drilling Company, Inc. upon oath state that the above and foregoing is a true and correct copy of the log of the #1 Heyen 'D' test.



 R. J. THATCHER

Subscribed and sworn to before me this 28th day of September, 1978.

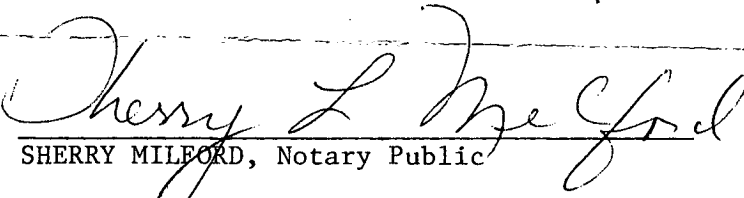

 SHERRY MILFORD, Notary Public

My Commission Expires: 6/12/82

