


STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

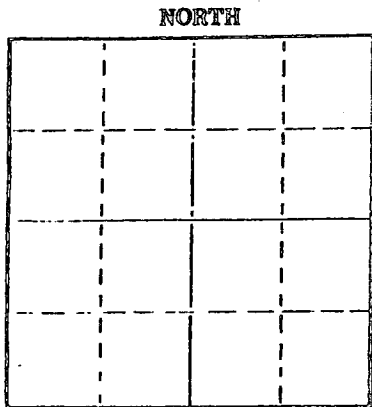

Locate well correctly on above Section Plot

Egan County. Sec. 6 Twp 11 Rge 32W (E) (W)
Location as "NE/CNW/SE" or footage from lines C NW SE
Lease Owner Donald C. Slawson
Lease Name Bertrand 'C' Well No. 1
Office Address 408 120 Building, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed June 11, 1975
Application for plugging filed June 11 1975
Application for plugging approved June 11 1975
Plugging commenced June 11 1975
Plugging completed June 11 1975
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well W.L. Nichols, Morland, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4645 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PLY IN	FULLED OUT
8 5/8"	285'				283'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

1st plug @ 1500' w/70 sx
2nd plug @ 250' w/20 sx
3rd plug @ 40' w/10 sx
2 sx in rat hole

Name of Plugging Contractor Slawson Drilling Company (If additional description is necessary, use BACK of this sheet)
Address 408 120 Building

STATE OF KANSAS COUNTY OF SEDGWICK
James C. Remsberg

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James C. Remsberg
James C. Remsberg

Subscribed and sworn to before me this 16th day of June 1975

My commission expires _____
DOLORES B. COADY
STATE NOTARY PUBLIC
SEDGWICK COUNTY, KANSAS
Comm. Expires Mar. 7, 1976

(Address) _____
Dolores B. Coady
Notary Public

RECEIVED
STATE CORPORATION COMMISSION
6-23-1975
JUN 23 1975
CONSERVATION DIVISION
Wichita, Kansas

WELL LOG

OPERATOR: Donald C. Slawson
 408 120 Building
 Wichita, Kansas 67202

LEASE: #1 Bertrand 'C'
 C NW SE Sec. 6-11-32W
 Logan County, Kansas

CONTRACTOR: Slawson Drilling Company, Inc.

COMMENCED: May 31, 1975

COMPLETED: June 11, 1975

CASING: Set 8 5/8" @ 283' w/250 sx

TOTAL DEPTH: 4645 feet

0 - 290	Sand and Clay Sand
290 - 983	Shale and Shells
983 - 1710	Shale, Shells and Sand
1710 - 1740	Sand
1740 - 2507	Shale and Sand
2507 - 2601	Shale, Shells and Sand
2601 - 2672	Anhydrite
2672 - 4155	Shale and Lime
4155 - 4645	Lime
4645	RTD

STATE OF KANSAS)
)
 COUNTY OF SEDGWICK) SS.

I, JAMES C. REMSBERG, of the Slawson Drilling Company, Inc. upon oath state that the above and foregoing is a true and correct copy of the log of the Bertrand 'C' #1 well.

James C. Remsberg
 JAMES C. REMSBERG

Subscribed and sworn to before me this 16th day of June, 1975

Dolores B. Coady
 Dolores B. Coady, Notary Public

My Commission Expires:

