


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

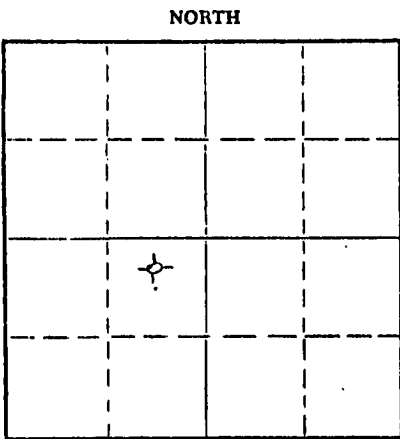

Locate well correctly on above
Section Plat

ELLIS County. Sec. 1 Twp. 11S Rge. 16 (E) W (W)
Location as "NE/CNW/SW" or footage from lines C/N/2 NE/4 SW/4
Lease Owner BIRMINGHAM-BARTLETT DRILLING CO.
Lease Name BOWLBY Well No. 4
Office Address 300 KAUFMAN BUILDING, WICHITA, KANSAS 67202
Character of Well (completed as Oil, Gas or Dry Hole) DRY HOLE
Date well completed NOVEMBER 16, 19 66
Application for plugging filed (verbally) NOVEMBER 16, 19 66
Application for plugging approved (verbally) NOVEMBER 16, 19 66
Plugging commenced NOVEMBER 16, 19 66
Plugging completed NOVEMBER 16, 19 66
Reason for abandonment of well or producing formation DRY HOLE

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well W. L. NICHOLS
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3344 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	219'	8-5/8"	219'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

BOTTOM PLUG SET AT 540' WITH 25 SACKS CEMENT.
CENTER PLUG SET AT 210' WITH 20 SACKS CEMENT.
TOP PLUG SET AT 40' WITH 10 SACKS CEMENT.

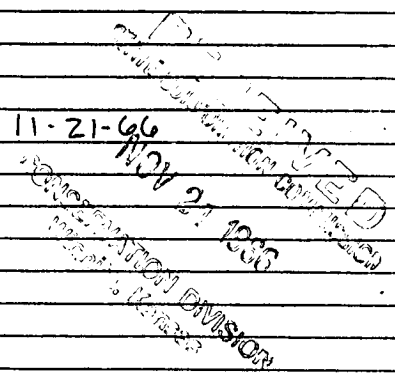

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor BIRMINGHAM-BARTLETT DRILLING CO.
Address 300 KAUFMAN BUILDING, WICHITA, KANSAS 67202

STATE OF KANSAS COUNTY OF SEDGWICK
RICHARD HINDERY, PARTNER OF BIRMINGHAM-BARTLETT DRILLING CO., owner, operator & Contr.;
(employee of owner) or (owner or operator) of the above-described
well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the
above-described well as filed and that the same are true and correct. So help me God. BIRMINGHAM-BARTLETT DRILLING CO.

(Signature) By Richard Hindery PARTNER
300 Kaufman Bldg., Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 17th day of NOVEMBER, 19 66.

Beverly Larson
BEVERLY LARSON Notary Public.

My commission expires October 2, 1970.

BOWLBY NO. 4 WELL

LOCATION: C - N/2 NE/4 SW/4
Section 1-11S-16W
Ellis County, Kansas

SPUDED: 11- 9-66

COMPLETED: 11-16-66

OWNER, OPERATOR
and CONTRACTOR: Birmingham-Bartlett Drilling Co.
300 Kaufman Building
Wichita, Kansas 67202

SURFACE CASING: 8-5/8" surface casing set at
219' with 175 sacks cement.

OIL STRING: None set. Dry hole.
Plugged 11-16-66.

L O G

(Figures indicate bottom of formation)

0 -	30	Shale and clay
	60	Rock and gravel
	250	Shale
	390	Shale and shells
	610	Sand and shale
	1200	Red bed
	1469	Shale
	1800	Shale and shells
	2928	Shale and lime
	3070	Lime
	3140	Lime and shale
	3344	Lime
	3344	Rotary total Depth D & A

The undersigned, Richard Hindery, one of the partners of Birmingham-Bartlett Drilling Co., hereby certifies that the above is a true and correct log of the BOWLBY NO. 4 WELL as shown in the daily drilling reports.

BIRMINGHAM-BARTLETT DRILLING CO.

By Richard Hindery
Richard Hindery, Partner

Subscribed and sworn to before me
this 17th day of November, 1966.

Beverly Larson

Beverly Larson, Notary Public
My commission expires October 2, 1970.

RECEIVED
NOV 21 1966
DIVISION
KANSAS