

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

Rooks County, Sec. 4 Twp. 10S Rge. (E) 17 (W)

Location as "NE/CNW&SW&" or footage from lines NE NE NW

Lease Owner Clinton Oil Company

Lease Name Mary Schrandt Well No. 1

Office Address 1022 Hoover, Great Bend, Kansas 67530

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed September 19 50

Application for plugging filed April 16 19 75

Application for plugging approved April 17 19 75


Plugging commenced May 3 19 75

Plugging completed May 3 19 75

Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production March 8 19 75

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

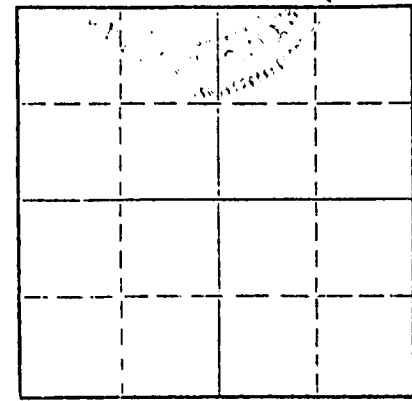

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Leo Massey

Producing formation Depth to top Bottom Total Depth of Well 3531 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	140'	None
				5-1/2"	3531'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Spotted 25 sacks of 60/40 posmix with 6% gel in 5-1/2" casing from 3456' - 3200'.

Spotted 30 sacks gel and 5 sacks of hulls from 3200' - 600'.

Spotted 50 sacks 60/40 posmix from 600' to surface.

Plugging Complete

5-13-75  
Notary Public

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Sun Oil Well Cementing, Inc.

Address Hays, Kansas 67601

STATE OF Kansas, COUNTY OF Barton, ss.


Terrence L. Ruder (employee of owner) or (owner/operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Terrence L. Ruder Terrence L. Ruder

1022 Hoover, Great Bend, Kansas 67530 (Address)

SUBSCRIBED AND SWORN to before me this 9th day of May, 19 75



Carolyn Smith Notary Public.

15-16-76