

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-007-21069-00-00
Spot: E2NWNWNE Sec/Twnshp/Rge: 8-35S-15W
300 feet from N Section Line, 2210 feet from E Section Line
Lease Name: Z BAR CATTLE CO C Well #: 1
County: BARBER Total Vertical Depth: 5204 feet

Operator License No.: 33168
Op Name: WOOLSEY OPERATING COMPANY, LL
Address: 125 N MARKET STE 1000
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	5204	3000	WITH 125 SX CMT
SURF	8.625	1055		WITH 450 SX CMT

169.13

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 01/09/2009 12:00 PM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE, INC. Phone: (620) 727-3410

Proposed Plugging Method: SAND TO 5110' & 4 SX CMT. PLUG AT 1070' WITH 12 SX GEL & 50 SX CMT. PLUG AT 600' WITH 50 SX CMT. PLUG AT 40' WITH 20 SX CMT.

Plugging Proposal Received By: ERIC MACLAREN Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 01/09/2009 1:30 PM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

SANDED BACK TO 5100' & PUT 4 SX CMT ON TOP OF SAND BRIDGE THROUGH DUMP BAILER. PLUG THROUGH 4 1/2" CASING. 1ST PLUG AT 1070' WITH 12 SX GEL & 50 SX CMT WITH 100# HULLS. 2ND PLUG AT 600' WITH 50 SX CMT & 100# HULLS. 3RD PLUG AT 40' WITH 20 SX CMT.

Perfs:

Top	Bot	Thru	Comments
5175	5180		
5160	5165		

2-5-09
2009061180

RECEIVED
KANSAS CORPORATION COMMISSION


JAN 21 2009

CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY QUALITY OILWELL CEMENTING.

Plugged through: CSG

District: 01

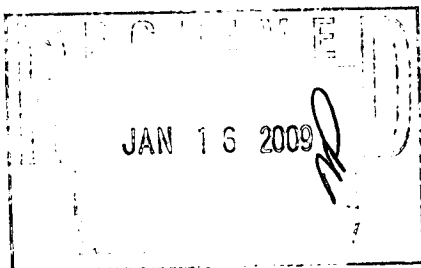

Signed

Stephen J Pfeifer
(TECHNICIAN)

Form CP-2/3

PKT
CSG