

Notice: Fill out COMPLETELY and return to Conservation Division at the address below within 60 days from plugging date.

KANSAS CORPORATION COMMISSION  
OIL & GAS CONSERVATION DIVISION

Form CP-4  
March 2009

Type or Print on this Form  
Form must be Signed  
All blanks must be Filled

WELL PLUGGING RECORD  
K.A.R. 82-3-117

OPERATOR: License #: 7030  
 Name: John Roy Evans Oil Company, LLC  
 Address 1: P.O. Box 385  
 Address 2: \_\_\_\_\_  
 City: Claflin State: KS Zip: 67525 + 0385  
 Contact Person: Gary Kirmer  
 Phone: (620) 793-2026  
 Type of Well: (Check one)  Oil Well  Gas Well  OG  D&A  Cathodic  
 Water Supply Well  Other: \_\_\_\_\_  SWD Permit #: \_\_\_\_\_  
 ENHR Permit #: \_\_\_\_\_  Gas Storage Permit #: \_\_\_\_\_  
 Is ACO-1 filed?  Yes  No If not, is well log attached?  Yes  No  
 Producing Formation(s): List All (if needed attach another sheet)  
Toronto Depth to Top: 3080' Bottom: 3088' T.D. \_\_\_\_\_  
Lansing/Kansas City Depth to Top: 3108' Bottom: 3376' T.D. \_\_\_\_\_  
Conglomerate Sand Depth to Top: 3408' Bottom: 3418' T.D. \_\_\_\_\_

API No. 15 - 15-141-01.000-0001  
 Spot Description: OSBORNE  
~~S/2 - N/2 - SE~~ Sec. 2 Twp. 10 S. R. 15  East  West  
2970 ~~2939~~ Feet from  North /  South Line of Section  
380 ~~463~~ Feet from  East /  West Line of Section  
 Footages Calculated from Nearest Outside Section Corner:  
 NE  NW  SE  SW  
 County: OSBORNE  
 Lease Name: FINNESY Well #: 2 "OWWO"  
 Date Well Completed: \_\_\_\_\_  
 The plugging proposal was approved on: 10/2/2008 (Date)  
 by: Steve Bond (KCC District Agent's Name)  
 Plugging Commenced: 10/29/2008  
 Plugging Completed: 10/29/2008  
 RECEIVED  
 APR 22 2009

Show depth and thickness of all water, oil and gas formations.

Oil, Gas or Water Records		Casing Record (Surface, Conductor & Production)			
Formation	Content	Casing	Size	Setting Depth	Pulled Out
		Surface	8 5/8"	206'	
		Production	4 1/2"	3768'	

Describe in detail the manner in which the well is plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same depth placed from (bottom), to (top) for each plug set.

Perforate 2 holes @ 1500', 2 holes @ 1140', 2 holes @ 600' and 2 holes @ 190'. Ran 2 3/8" tubing into hole and plugged through tubing. 1st plug @ 3029' with 150 sx 60/40 Pox mix, 4% gel. 2nd plug @ 1500' with 80 sx. 3rd plug @ 750' with 75 sx and circulated cement. Tied Onto 4 1/2" casing and mixed 20 sx and shut in @ 250 psi. Tied onto 8 5/8" and mixed 5 sx and shut in @ 200 psi. Well was topped off with 6 sx cement 2 weeks after plugging date. Head was cut off below plow depth and cellar was covered up.

*Express Well Service & Supply Inc*

Plugging Contractor License #: 32528 6426 Name: David Funk/Quality Oilwell Cementing, Inc.  
 Address 1: P.O. Box 32 Address 2: \_\_\_\_\_  
 City: Russell State: KS Zip: 67665 + \_\_\_\_\_  
 Phone: (785) 483-2025  
 Name of Party Responsible for Plugging Fees: John Roy Evans Oil Company, LLC

State of Kansas County, Barton, ss.  
Gary Kirmer (Print Name)  Employee of Operator or  Operator on above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts statements, and matters herein contained, and the log of the above-described well is as filed, and the same are true and correct, so help me God

Signature: Gary Kirmer

Quality Oilwell Cementing Inc.

740 W WICHITA  
P.O. Box 32  
Russell, KS 67665

# Invoice

Date	Invoice #
10/30/2008	1170

<b>Bill To</b>
JOHN ROY EVANS P.O. BOX 385 CLAFLIN KS 67525

RECEIVED  
APR 22 2009  
KCC WICHITA

P.O. No.	Terms	Project
	Net 30	

Quantity	Description	Rate	Amount
198	common	13.10	2,593.80T
132	POZ	7.10	937.20T
13	GEL	20.00	260.00T
5	hulls	50.00	250.00T
468	handling	2.10	982.80T
14,508	.09 * 468 SACKS * 31 MILES	0.09	1,305.72T
1	pump truck charge plugging	850.00	850.00T
31	pump truck mileage charge	7.00	217.00T
740	discount 10% if paid within 30 days DISCOUNT HAS ALREADY BEEN DEDUCTED	-1.00	-740.00
	LEASE: FINNESSY WELL #2 Osborne County Sales Tax	5.80%	429.00

Thank you for your business. Dave

**Total** \$7,085.52

# QUALITY OILWELL CEMENTING, INC.

Phone 785-483-2025  
Cell 785-324-1041


Home Office P.O. Box 32 Russell, KS 67665

No. 2268

Date	10-29-08	Sec.	2	Twp.	10	Range	15	Called Out		On Location		Job Start		Finish	5:00 PM	
Lease	Financing	Well No.		Location	Wichita 10 29 08			County	Os	State	Ks					
Contractor	Financing Well Services							Owner	To Quality Oilwell Cementing, Inc. You are hereby requested to rent cementing equipment and furnish cementer and helper to assist owner or contractor to do work as listed.							
Type Job	Cementing							Charge To	John King, Fin							
Hole Size								Depth	RECEIVED							
Csg. Size								Depth	APR 22 2009							
Tbg. Size								Street								
Drill Pipe								City	State							
Tool								Depth	KCC WICHITA							
Cement Left in Csg.								The above was done to satisfaction and supervision of owner agent or contractor.								
Press Max.								Shoe Joint								
Meas Line								Minimum								
Perf.								Displace								

EQUIPMENT			Amount Ordered	CEMENT	
Pumptrk	1	No. Cementer/Helper	1	Used 3300	15 Hulls
Bulktrk	7	No. Driver	450	450	450
Bulktrk		No. Driver			
KULLCELL			JOB SERVICES & REMARKS		
Pumptrk Charge	PTA		850.00	Chloride	
Mileage	31 @ 7.00		217.00	Hulls	5 @ 50.00
Footage				Salt	
Total			1067.00	Flowseal	

Remarks:		Sales Tax	
1st hole 2000 ft. 1st hole 2000 ft. 1st hole 2000 ft.		Handling	468 @ 2.00
2nd hole 1500 ft. 2nd hole 1500 ft. 2nd hole 1500 ft.		Mileage	.09 per mile 11.10
3rd hole 750 ft. 3rd hole 750 ft. 3rd hole 750 ft.		PUMP TRUCK CHARGE	
		Sub Total	1067.00
		Total	
		Floating Equipment & Plugs	
		Squeeze Manifold	
		Rotating Head	
		Tax	429.00
		Discount	(740.00)
		Total Charge	7085.52

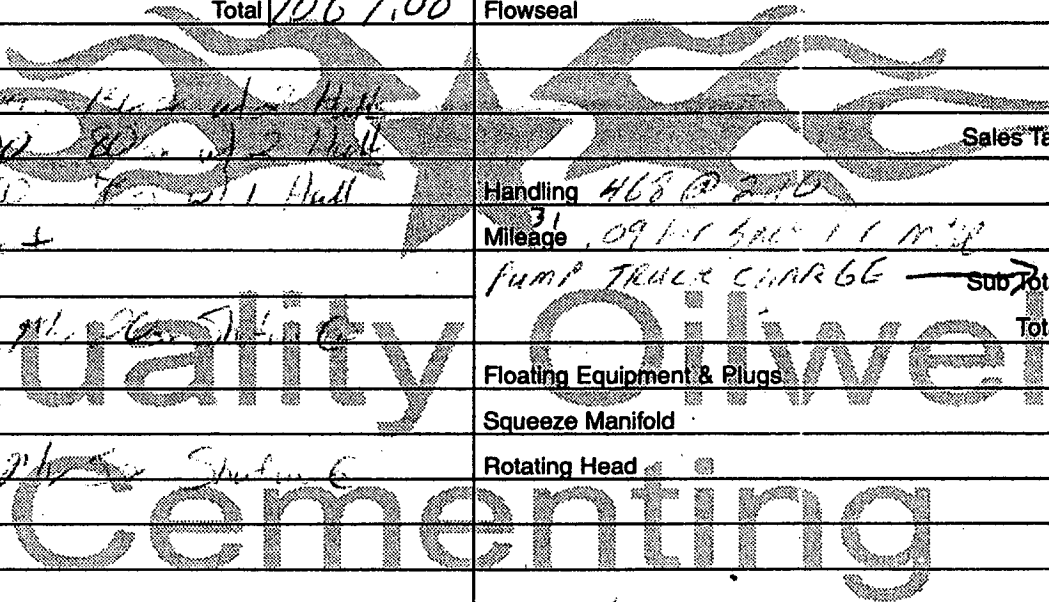

Signature: *[Handwritten Signature]*