

15-167-06211-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

OR  
FORMATION PLUGGING RECORD

Strike out upper line  
when reporting plug-  
ging off formations.

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Biting Building  
Wichita, Kansas

NORTH



Locate well correctly on above  
Section Flat

Russell

County. Sec. 33 Twp 12 S Rge 13 (E) W (W)

Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines SE/4 SE/4 NE/4

Lease Owner Bell Oil and Gas Company

Lease Name Norman J. Gross Well No. 1

Office Address Box 2007, Tulsa 1, Oklahoma

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed Nov. 15 1943

Application for plugging filed Nov. 16 1943

Application for plugging approved Nov. 16 1943

Plugging commenced Nov. 17 1943

Plugging completed Nov. 17 1943

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was com-  
menced? Yes

Name of Conservation Agent who supervised plugging of this well B. T. Alexander

Producing formation Dry Depth to top 3,523 Bottom 3,560 Total Depth of Well 3,560 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Topeka		2,560'				
Kansas City		2,999'				
Conglomerate		3,341'				
Viola		3,414'				
Simpson		3,472'				
Arbuckle		3,523'	3,560'			


Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Mud 0' to 6'  
 Cement 6' to 26'  
 Mud 26' to 230'  
 Cement 230' to 275'  
 Bridge 275'  
 Mud 275' to 3560'

33 12 13W  
102 46

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Bell Oil and Gas Company  
Address Box 2007, Tulsa, Oklahoma

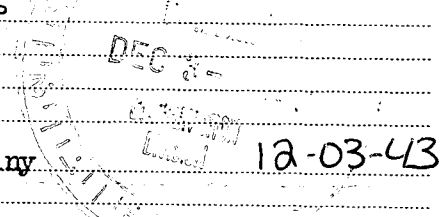

STATE OF OKLAHOMA, COUNTY OF TULSA, ss.  
Benedict I. Lubell, Vice President (employee of owner) or (owner or operator) of the above-described well,  
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-  
described well as filed and that the same are true and correct. So help me God.

(Signature) Benedict I. Lubell V.P.

BELL OIL & GAS CO., BOX 2007, TULSA, OKLA. (Address)

SUBSCRIBED AND SWORN to before me this 2nd day of December, 1943

[Signature of Notary Public]

Notary Public.

My commission expires 4-17-47

November 30, 1943

Bell Oil and Gas Company

P.O. Box 2007

Tulsa 1, Oklahoma

IN ACCOUNT WITH

HISSOM DRILLING COMPANY

709 THOMPSON BLDG.  
TULSA, OKLA.

Formation log of Bell Oil and Gas Company Cross Well No. 1, located in Northeast Quarter of Section 33, Township 12 South, Range 13 West, Russell County, Kansas.

From	To		
0	40	Rock and clay	
40	265	Shale and shells	
265	280	Sand	
280	340	Shale and shells	(Slope test OK @ 200)
340	490	Sand, shells and pyrite	
490	744	Red bed and shale	
744	825	Anhydrite	(Slope test OK @ 800)
825	1125	Shale and shells	
1125	1440	Salt and shale	
1440	1505	Shale and shells	(Slope test and SLM OK @ 1500)
1505	1720	Line - broken	
1720	2660	Lime and shale	(Slope test OK @ 2000 & 2500)
2660	2805	Lime - broken	
2805	3344	Lime	(Slope test OK @ 3000 and Steel Line Meas. OK @ 3225)
3344	3374	Lime and chert	
3374	3408	Lime and conglomerate	
3408	3450	Conglomerate	
3450	3485	Lime - brown	
3485	3515	Sand and green shale	
3515	3529	Lime and shale	
3529	3560	Lime	
3560		Total Depth. Well a dry hole - plugged.	

CERTIFICATION

We hereby certify that the above is a true and accurate log, as transcribed from our Daily Drilling Reports, of the Bell Oil and Gas Company, Cross Well No. 1 located in NE/4 of Section 33-12S-13W, Russell County, Kansas.

HISSOM DRILLING COMPANY

BY

*L. R. McKinnon*  
Secretary

