

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:


OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

Conservation Division
State Corporation Commission
800 Blitting Building
Wichita, Kansas

Rooks County. Sec. 34 Twp. 10S Rge. (E) 17 (W)

NORTH

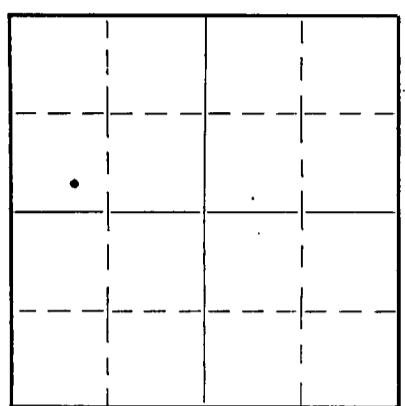

Locate well correctly on above
Section Plat

Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines SE SW NW
Lease Owner Gulf Oil Corporation - Gyprod. Div.
Lease Name C. O. Brumitt Well No. 1
Office Address PO Box 661, Tulsa, Oklahoma
Character of Well (Completed as Oil, Gas or Dry Hole) _____
Date, well completed August 2, 1943 193
Application for plugging filed August 2, 1943 193
Application for plugging approved August 4, 1943 193
Plugging Commenced August 4, 1943 193
Plugging Completed August 4, 1943 193
Reason for abandonment of well or producing formation Not Commercial Producer

If a producing well is abandoned, date of last production _____ 193
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well Burt Stafford, Lyons, Kansas
Producing formation Arbuckle Depth to top 3505' Bottom 3527' Total Depth of Well 3527' Feet.

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Anhydrite				8-5/8"	1163'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled with heavy mud to 1163'. Placed plug and bridge at 1163'. Cemented through drill pipe with 20 sx cement from 1163' to 1100'. Heavy mud from 1100' to 200'. Placed plug and bridge at 200' and cemented from 200' to 140' with 20 sx cement through drill pipe. Heavy mud from 140' to 20'. Placed plug at 20' and capped into cellar with 12 sx cement.

34 10 17W
96 20

8-19-43

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Gulf Oil Corporation - Gyprod. Div.
Address P. O. Box 661, Tulsa, Oklahoma

STATE OF Kansas, COUNTY OF Rice, ss. J. A. Lee (employee of owner) or (owner or operator) of the above-described well,


being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. A. Lee
Lawrence, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 16th day of August, 1943

My commission expires May 12, 1946

Virgil B. Stevenson
Notary Public.

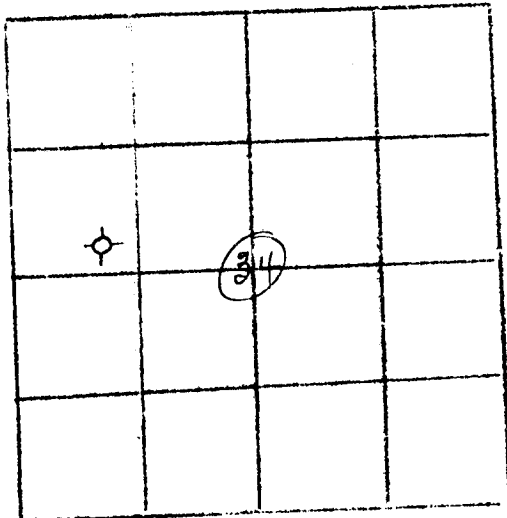

WELL RECORD:

GULF OIL CORPORATION, TULSA, OKLAHOMA

BRUMITT #1 - C SE SW NW Section 34-10S-17W,
Rooks County, Kansas

CONTRACTOR - MERCURY DRILLING COMPANY, TULSA, OKLAHOMA

DRILLING COMMENCED - ^{July} ~~SEPTEMBER~~ 17, 1943

DRILLING COMPLETED - ^{2/20} AUGUST 3, 1943

ROFARY 0' to 3527' T.D.

Section 34-Township 10South,
Range 17 West, Rooks County, Kansas

CASING RECORD:

Set and cemented 39 jts. of 3-5/8" 3-thd. Casing at 1163' with 550 sacks bulk cement.

FORMATION RECORD

<u>FORMATION</u>	<u>TOP</u>	<u>BOTTOM</u>
Surface Dirt	0	10
Shale	10	160
Shale & Shells	160	250
Shale	250	365
Shale & Sand	365	760
Sand	760	790
Shale	790	845
Sand	845	880
Shale	880	900
Shale & Shells	900	1005
Red Bed, Pyrite Shells	1005	1150
Lime	1150	1192
Red Bed	1192	1320
Shale & Shells	1320	1510
Salt & Shale	1510	1625
Salt	1625	1800
Shale	1800	1855
Shale & Lime	1855	1960
Broken Lime	1960	2121
Lime & Shale	2121	2265
Lime	2265	2323
Shale & Shells	2323	2394
Lime & Shale	2394	2540
Shale & Shells	2540	2670
Shale & Lime	2670	2840
Shale	2840	2865
Lime	2865	3067
Lime & Shale	3067	3155
Lime	3155	3326
Lime & Shale	3326	3377
Lime	3377	3406
Broken Lime	3406	3420
Lime	3420	3467
Shale	3467	3505
Lime	3505	3527

FILE 34 10 17W
86 20

We hereby certify that the above is a true and correct record of the log on the Brumitt No. 1 well in the center of the Southeast quarter of the Southwest quarter of the Northwest quarter of Section 34, Township 10 South, Range 17 West, Rooks County, Kansas.

MERCURY DRILLING COMPANY

BY *Chester H. Westfall*

CHESTER H. WESTFALL, PRESIDENT

WITNESSES:

H. Cook

Asst. Secy.