

KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION AGENT'S REPORT

TO:
Jewel M. Ogden, Director
500 Insurance Building
212 North Market
Wichita 2, Kansas

File No. _____ County: _____ Rooks
Location: SE SW NE Sec. 34 Twp. 10 Rge. 17 (E) (W)
Name of Field: _____ Total Depth: 3484

I have this date completed supervision of plugging of:

Lease Name: Brummit Well No. 1
Operator's Full Name: Iron Drg Co
Complete Address: Box 51 Ellinwood, Kans
Plugging Contractor: J. M. Washabaugh Drg Co (cable tools) & Halliburton Cement
ing Co
Address: _____ License No. _____

Oil Well ☒ Gas Well _____ Input Well _____ SWD Well _____ D & A _____

Other well as hereafter indicated: _____

Was any delay in plugging operations caused by Conservation Division Agent? Yes _____ No ☒

If yes how long? _____ Reason: _____

Operation Completed: Hour 10:30AM Day 10 Month 6 Year 59

The above well was plugged as follows:

8 5/8" at 163' circulated with cement-5 1/2" 3478' with 75 sax cement

5 1/2" disintegrated at 700' - pulled 700' 5 1/2" -

Ran 550' 2" tubing in hole and circulated same with heavy mud (35 sax Gel)

displaced 20 sax cement through 2" at 550', heavy mud to 160', displaced

15 sax cement through 2" at 160', heavy mud to 30' and filled with


cement from 30' to 0'

Mudding and cementing by Halliburton Cementing Co.

Signed: Leon Lee
Conservation Division Agent

Reviewed: J. Lewis Brock
Field Supervisor

Remarks:

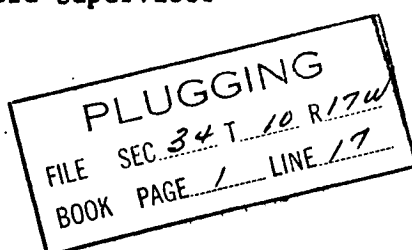

RECEIVED
STATE CORPORATION COMMISSION
6-17-59

RECEIVED
STATE CORPORATION COMMISSION
KANSAS