


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

NORTH

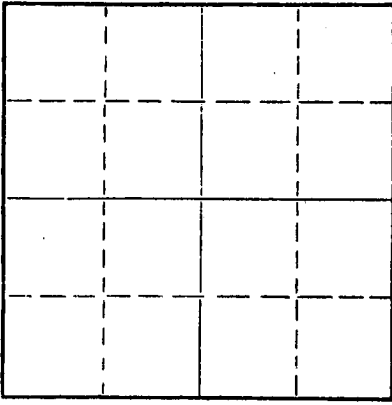

Locate well correctly on above
Section Plat

Russell County, Sec. 11 Twp. 12 Rge. 15 (E) W (W)
Location as "NE/CNWxSWx" or footage from lines SE/4 SW/4 NW/4
Lease Owner Darrell E. Haynes
Lease Name Foster Well No. 1
Office Address Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed March 28 1966
Application for plugging filed March 28 1966
Application for plugging approved March 28 1966
Plugging commenced March 28 1966
Plugging completed March 28 1966
Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Donald Truan
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3,225 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	201'	Cmtd. w/160 sax

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Fill w/heavy mud to 400'
Set bridge plug @ 400'
Dump 20 sax cement on plug thru 4 1/2" drill pipe
Fill w/heavy mud to 200'
Set bridge plug @ 200'
Dump 20 sax cement on plug thru 4 1/2" drill pipe
Fill w/heavy mud to 40'
Set bridge plug @ 40' w/1/2 sax hulls on plug
Dump 10 sax cement on plug to cellar

RECEIVED
STATE CORPORATION COMMISSION
4-18-1966
APR 18 1966

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Shields Drilling Co., Inc.
Address Shields Bldg., Russell, Kansas

STATE OF KANSAS, COUNTY OF RUSSELL
R. J. Shields contractor

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. J. Shields
Shields Bldg., Russell, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 4th day of April, 1966



Ruth Phillips
Notary Public.

My commission expires May 26, 1967



Shields


15-167-30180-00-00

Russell, Kansas

WELL LOG

Operator: Darrell E. Haynes
 Well: Foster #1
 Commenced: March 20, 1966
 Completed: March 28, 1966
 Contractor: Shields Drilling Co., Inc.

Well Description: SE SW NW
 Sec. 11-12S-15W
 Russell Co., Kansas



CASING RECORD

Size	Run	Pulled
8 5/8"	201'	Cmtd. w/160 sax

Elevation:
 Treatment:
 Production:
 Tops:

..... Figures Indicate Bottom of Formations

Clay, sand & shale	201'
Shale & sand	380'
Hard sand & pyrite	410'
Shale, shells & redbed	787'
Anhydrite	824'
Shale & shells	1,140'
Shale, shells & salt	1,475'
Lime & shale	1,700'
Lime	1,950'
Lime & shale	2,670'
Lime	3,225' RTD

RECEIVED
 STATE CORPORATION COMMISSION
 4-18-1966
 APR 18 1966
 CONSERVATION DIVISION
 Wichita, Kansas

Notes