

15-167-20774-00-00

FORM CP-4

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

Russell County, Sec. 21 Twp. 12S Rge. 15 (E) (W)

Location as "NE/CNWKSWX" or footage from lines NW SW SE

Lease Owner Louis M. Mai Operations

Lease Name Schmeidler Well No. 1

Office Address Russell, Kansas 67665

Character of Well (completed as Oil, Gas or Dry Hole) Dry hole

Date well completed 9-23 1975

Application for plugging filed 9-23 1975

Application for plugging approved 9-23 1975


Plugging commenced 9-23 1975

Plugging completed 9-23 1975

Reason for abandonment of well or producing formation None

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

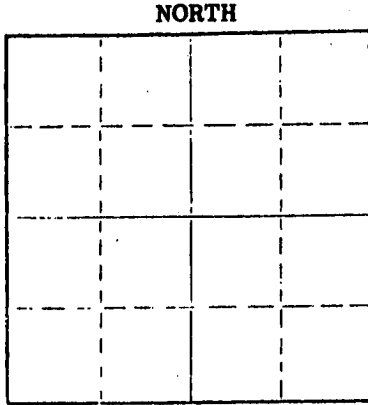

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Duane Rankin

Producing formation Depth to top Bottom Total Depth of Well 3293 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	252	8-5/8"	252	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole w/heavy mud & pumped 35 sks cement down drill pipe
Bridged hole @ 200' & pumped 25 sks cement down drill pipe.
Set plug @ 30' & filled hole to surface w/10 sks cement.
Dump 2 sks cement in rat hole. Job completed @ 8:00 A.M.

RECEIVED
STATE CORPORATION COMMISSION
9-30-1975
SEP 30 1975
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Emphasis Oil Operations

Address Box 506, Russell, Kansas 67665

STATE OF Kansas COUNTY OF Russell, ss.

Joe K. Branum (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Joe K. Branum


Box 506, Russell, Kansas 67665

(Address)

SUBSCRIBED AND SWORN TO before me this 29th day of September, 1975

My commission expires November 13, 1975

Notary Public.



15-167-20774-00-00

EMPHASIS OIL OPERATIONS

P. O. Box 506

Russell, Kansas 67665

DRILLERS LOG

OPERATOR: Louis M. Mai Oil Operations
138 West 7th Street
Russell, Kansas 67665

CONTRACTOR: Emphasis Oil Operations
P. O. Box 506
Russell, Kansas 67665

LEASE: Schmeidler

WELL: #1

LOCATION: NW SW SE
Section 21-12S-15W
Russell County, Kansas

Total Depth: 3293'

Elevation:

Commenced: 9-12-75

Completed: 9-23-75

Casing: 8-5/8" @ 252'

Status: Dry Hole

RECEIVED
STATE CORPORATION COMMISSION
9-30-1975
SEP 30 1975

CONSERVATION DIVISION
Wichita, Kansas

DEPTHS & FORMATIONS

(All measurements from K.B.)

Shale	884	Lime	2000
Anhydrite	925	Lime & Shale	2250
Shale & Shells	1140	Lime	2630
Shale & Lime	1615	Lime & Shale	2815
Lime & Shale	1895	Lime	3293

STATE OF KANSAS)
COUNTY OF RUSSELL) ss

I, Joe K. Branum, of Emphasis Oil Operations, state that the above and foregoing is a true and correct log of the above captioned well.

Joe K. Branum

Joe K. Branum

Subscribed and sworn to before me this 29th day of September, 1975,
My commission expires: November 13, 1975.

Mary Arma Branum

Notary Public

