


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Rooks County, Sec. 36 Twp. 10 S Rge. 17W E/W
Location as "NE/CNW $\frac{1}{4}$ /SW $\frac{1}{4}$ " or footage from lines
NW NW SW

Lease Owner Edmiston Oil Company
Lease Name Brungardt Well No. D-1
Office Address First National Bank Bldg, Wichita, Ks.
Character of Well (Completed as Oil, Gas or Dry Hole)
Dry Hole

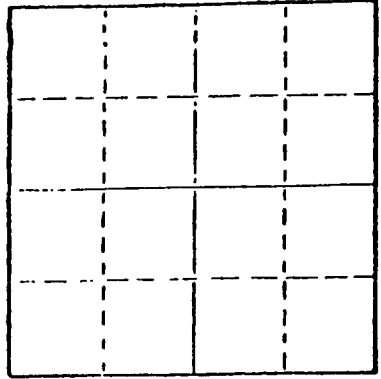

Locate well correctly on above
Section Plot

Date Well completed May 27 19 76
Application for plugging filed May 27 19 76
Application for plugging approved May 27 19 76
Plugging commenced May 27 19 76
Plugging completed May 27 19 76

Reason for abandonment of well or producing formation
Dry Hole
If a producing well is abandoned, date of last production
19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation Depth to top Bottom Total Depth of Well 3690'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from feet to
feet for each plug set.

Bottom plug @ 660' w/70 sacks cement thru drill pipe.
Middle plug @ 240' w/20 sacks cement thru drill pipe.
Top plug @ 40' $\frac{1}{2}$ sack hulls and 10 sacks cement.
2 sacks cement in rat hole.

STATE CORPORATION COMMISSION
6-1-76
JUL 0 1976

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Duke Drilling Co.

STATE OF KANSAS COUNTY OF BARTON, ss.
Larry Curtis (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) Larry Curtis
Box 823, Great Bend, Ks. 67530
(Address)

SUBSCRIBED AND SWORN TO before me this 27th day of May, 19 76

My commission expires April 11, 1978

Harold M. Waage
Notary Public.

DRILLERS' WELL LOG

DATE COMMENCED: May 18, 1976
DATE COMPLETED: May 27, 1976

Edmiston Oil Company
BEUNGARDT D-1
NW NW SW
Sec 36-T103-RL7W
Rooks County, Kansas

ELEVATION: 2076 K.B.

0 - 65'	Post Rock
65 - 200'	Clay, Sand Streaks
200 - 758'	Shale
758 - 806'	Sand
806 - 1280'	Shale
1280 - 1315'	Anhydrite
1315 - 1451'	Shale, Shell
1451 - 3224'	Shale, Lime
3224 - 3228'	Shale
3228 - 3241'	Shale, Lime
3241 - 3265'	Lime
3265 - 3659'	Lime, Shale
3659 - 3690'	Dolomite
3690'	RTD

FORMATION TOPS

Anhydrite	1280'
Heebner	3224'
Toronto	3241'
Lansing	3265'
Arbuckle	3659'
RTD	3690'

SURFACE PIPE:

Set new, 20#, 8 5/8" pipe @ 263'
w/170 sacks Common, 2% Gal, 3% cc.

AFFIDAVIT

STATE OF KANSAS }
COUNTY OF BARTON } ss.

Larry Curtis, of lawful age, does swear and state that the facts and statements herein contained are true and correct to the best of his knowledge.

Larry Curtis

Subscribed and sworn to before me this 27th day of May, 1976.

Heather M. Hague
Notary Public

My Commission Expires: April 11, 1978