

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Rooks County. Sec. 8 Twp. 10 Rge. 18 (X) (W)

Location as "NE/CNW%SW%" or footage from lines C - NW/4 NW/4 NE/4

Lease Owner Midstates Oil Corporation, Tulsa, Oklahoma

Lease Name A. C. Wise "A" Well No. 4

Office Address Seventh Floor Midstates Bldg., Tulsa, Oklahoma

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed January 17, 1954

Application for plugging filed January 18, 1954

Application for plugging approved (Verbal) January 17, 1954


Plugging commenced January 17, 1954

Plugging completed January 17, 1954

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production None 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

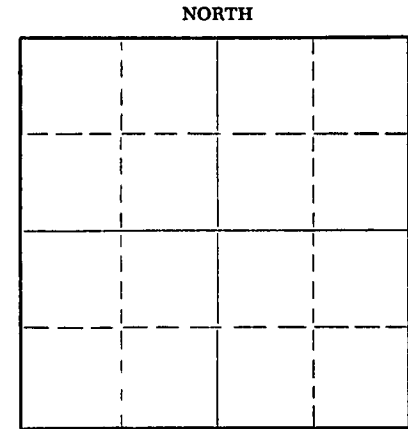

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Mr. Eldon Petty Hays, Kansas

Producing formation None Depth to top _____ Bottom _____ Total Depth of Well 3772 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	1590'	10-3/4"	1590'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Set Halliburton Rubber Plug at 240' - 20 sack cement on top of plug - Filled with Rotary Mud to 40' from surface - Set Second Halliburton Rubber Plug at 40' from surface - Half Sack Halls on top of plug. - Cemented to surface.

1-21-54

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor M. B. Armer

Address 710 Petroleum Bldg., Wichita, Kansas


STATE OF OKLAHOMA, COUNTY OF TULSA, ss.

W. H. Barclay (employee of owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. H. Barclay
Tulsa, Oklahoma (Address)

SUBSCRIBED AND SWORN TO before me this 19th day of January, 1954

My commission expires March 21, 1955 Betty June Sawyer Notary Public.



<u>Formation</u>	<u>Top</u>	<u>Bottom</u>
Sand	0	200
Gravel	200	260
Sand & Shale	260	330
Shale & Shells	330	1030
Shale, Sand & Iron Streak	1030	1135
Shale & Sand	1135	1265
Shale	1265	1335
Shale & Red Bed	1335	1585
Anhydrite	1585	1625
Shale & Shells	1625	1665
Shale, shells & Red Bed	1665	1915
Shale, Shells, Salt & Red Bed	1915	2075
Shale & Lime	2075	2550
Shale & Broken Lime	2550	2685
Shale & Lime	2685	3050
Shale & Broken Lime	3050	3135
Shale & Lime	3135	3270
Lime	3270	3366
Lime & Shale	3366	3426
Lime	3426	3448
Lime & Chert	3448	3460
Lime	3460	3470
Lime & Shale	3470	3654
Lime	3654	3677
Shale & Lime	3677	3720
Red Shale	3720	3772
Total Depth		3772