


15-163-02607-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

Rooks County, Sec. 13 Twp. 10S Rge. 18W (E) (W)
Location as "NE/CNW%SW%" or footage from lines C SE NE
Lease Owner Davis Bros.-Transit Corporation
Lease Name Schlueter Well No. 1
Office Address 1516 Liberty Bank Bldg., Oklahoma City, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) D & A
Date well completed December 8, 19 58
Application for plugging filed December 8, 19 58
Application for plugging approved December 8, 19 58
Plugging commenced December 8, 19 58
Plugging completed December 8, 19 58
Reason for abandonment of well or producing formation No production

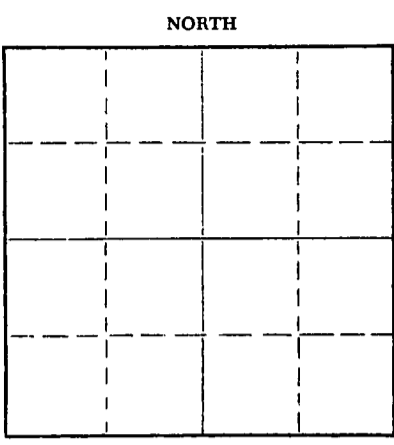

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty, Box 326, Hays, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____ Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	175'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy drilling mud to 500'; set plug, cemented with 20 sacks cement
Filled hole with heavy drilling mud to 165'; set plug, cemented with 15 sacks cement
Filled hole with heavy drilling mud to 40'; set plug, cemented with 10 sacks cement to bottom of cellar.

1-13-59

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Transit Corporation
Address 1516 Liberty Bank Building, Oklahoma City, Oklahoma

STATE OF Oklahoma, COUNTY OF Oklahoma, ss.
Paul E. Gathers (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Paul E. Gathers
1516 Liberty Bank Building
(Address)

SUBSCRIBED AND SWORN TO before me this 9th day of January, 19 59

Mildred Iron
Notary Public.

My commission expires May 17, 1962

PLUGGING
FILE SEC. 13 T. 10 R. 18W.
BOOK PAGE 5 LINE 24

DRILLER'S WELL LOG

Davis Bros.-Transit Corporation - Schlueter # 1 well located in
C SE NE Section 13-10S-18W,
Rooks County, Kansas

Commenced: November 27, 1958
Completed: December 9, 1958
Elevation: 2164'

Casing 8 5/8" @ 175'
Cemented w/130 sacks

<u>Formation</u>	<u>From</u>	<u>To</u>
Surface clay	0	70
Sand	70	120
Shale	120	890
Sand	890	1180
Shale and shells	1180	1475
Anhydrite	1475	1506
Shale	1506	2140
Shale and lime	2140	2160
Lime and shale	2160	2405
Lime	2405	2510
Lime and shale	2510	2740
Shale and lime	2740	2925
Lime and shale streaks	2925	2992
Lime streaks and shale	2992	3100
Lime and shale	3100	3253
Lime	3253	3635
Chert	3635	3660
Shale and chert	3660	3725
Simpson dolomite	3725	3747
Lime and shale	3747	3777 TD

Summary of Formation

Anhydrite	1475'
Topeka	3118'
Heebner	3336'
Toronto	3353'
Lansing	3379'
Base of K.C.	3617'
Conglomerate	3635'
Simpson shale	3702'
Simpson sand	3710'
Simpson Dolo.	3725'
Arbuckle	3744'

I hereby certify the foregoing to be a true and accurate Driller's Log of the formation encountered in the above well.

Subscribed and sworn to before me
this 9th. day of January, 1959.

TRANSIT CORPORATION

BY Paul E. Gardner

My Commission expires May 17, 1962.

Mildred Iron
Notary Public

PLUGGING
FILE SEC. 13 T. 10 R. 18W
BOOK PAGE 5 LINE 24